



STANDARDIZED

UXO TECHNOLOGY DEMONSTRATION SITE

MOGULS SCORING RECORD NO. 587

SITE LOCATION: U.S. ARMY YUMA PROVING GROUND

DEMONSTRATOR:
HUMAN FACTORS APPLICATIONS INC.
8 JAY GOULD COURT, UNIT D
WALDORF, MD 20602

TECHNOLOGY TYPE/PLATFORM: MAGNETOMETER SCHONSTEDT/HAND HELD

PREPARED BY:
U.S. ARMY ABERDEEN TEST CENTER
ABERDEEN PROVING GROUND, MD 21005-5059

JUNE 2005

20051101 038









Prepared for:
U.S. ARMY ENVIRONMENTAL CENTER
ABERDEEN PROVING GROUND, MD 21010-5401

U.S. ARMY DEVELOPMENTAL TEST COMMAND ABERDEEN PROVING GROUND, MD 21005-5055

DISTRIBUTION UNLIMITED, JUNE 2005.

DISPOSITION INSTRUCTIONS

Destroy this document when no longer needed. Do not return to the originator.

The use of trade names in this document does not constitute an official endorsement or approval of the use of such commercial hardware or software. This document may not be cited for purposes of advertisement.

		PORT	Form Approved OMB No. 0704-0188						
The public reporting maintaining the data is suggestions for reduction Suite 1204, Arlington of Information if it do PLEASE DO N	burden for this collect seeded, and completing ucing the burden, to D , VA 22202-4302. Re es not display a currer OT RETURN YO	ion of info and revie epartment spondents atly valid C OUR FO	r mation is e wing the col of Defense, should be MB control DRM TO	stimated to average 1 hour per r lection of information. Send com Washington Headquarters Servi aware that notwithstanding any o number. THE ABOVE ADDRESS.	esponse, including this nments regarding this ces, Directorate for other provision of law	ne time for rev burden estim Information Op w, no person si	lewing Instructions, searching existing data sources, gathering and ate or any other aspect of this collection of information, including serations and Reports ((704-0188), 1215-198ferson Davis Rilghway, hall be subject to any penalty for falling to comply with a collection		
	ATE (<i>DD-MM-Y</i>) une 2005	YY)	2. REP	ORT TYPE Final			3. DATES COVERED (From-To) 11 and 12 May 2004		
STANDARDIZED UXO TECHNOLOGY DEMONSTRATION SITE MOGULS SCORING RECORD NO. 587 (HUMAN FACTORS							CONTRACT NUMBER GRANT NUMBER		
						5c. PRO	GRAM ELEMENT NUMBER		
6. AUTHOR(S Overbay, Lan The Standard	rv: Robitaille. (George hnolog	y Demoi	nstration Site Scoring (Committee		NJECT NUMBER 8-CO-160-UXO-021		
						5e. TASI	K NUMBER		
						5f. WOR	K UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Commander U.S. Army Aberdeen Test Center ATTN: CSTE-DTC-AT-SL-E Aberdeen Proving Ground, MD 21005-5059							8. PERFORMING ORGANIZATION REPORT NUMBER ATC-9019		
9. SPONSORI Commander	NG/MONITORIN	G AGEN	ICY NAM	E(S) AND ADDRESS(ES	S)		10. SPONSOR/MONITOR'S ACRONYM(S)		
U.S. Army En ATTN: SFIM	vironmental Co I-AEC-ATT ving Ground, N		005-540	01			11. SPONSOR/MONITOR'S REPORT NUMBER(S) Same as item 8		
12. DISTRIBUT Distribution u	10N/AVAILABIL nlimited.	ITY STA	ATEMEN	<u>r</u>					
13. SUPPLEME	ENTARY NOTES					17,000			
14. ABSTRACT This scoring record documents the efforts of Human Factors Applications, Inc. to detect and discriminate inert unexploded ordnance (UXO) utilizing the YPG Standardized UXO Technology Demonstration Site Moguls. The scoring record was coordinated by Larry Overbay and the Standardized UXO Technology Demonstration Site Scoring Committee. Organizations on the committee include the U.S. Army Corps of Engineers, the Environmental Security Technology Certification Program, the Strategic Environmental Research and Development Program, the Institute for Defense Analysis, the U.S. Army Environmental Center, and the U.S. Army Aberdeen Test Center.									
15. SUBJECT 1 HFA UXO Sta Schonstedt/Ha	andardized Site	, YPG	, Standaı	dized UXO Technolog	gy Demonstra	tion Site I	Program, Moguls, Magnetometer		
	CLASSIFICATIO			17. LIMITATION OF ABSTRACT	18. NUMBER	19a. NAMI	E OF RESPONSIBLE PERSON		
a. REPORT Unclassified	b. ABSTRACT Unclassified		S PAGE assified	UL	PAGES	19b. TELEPHONE NUMBER (Include area code)			

ACKNOWLEDGEMENTS

Authors:

Larry Overbay Jr.
Matthew Boutin
Military Environmental Technology Demonstration Center (METDC)
U.S. Army Aberdeen Test Center (ATC)
U.S. Army Aberdeen Proving Ground (APG)

Robert Archiable EC 111, Limited Liability Company (LLC) U.S. Army Yuma Proving Ground (YPG)

Christina McClung
Aberdeen Test and Support Services (ATSS)
Sverdrup Technology, Inc.
U.S. Army Aberdeen Proving Ground (APG)

Contributor:

George Robitaille U.S. Army Environmental Center (AEC) U.S. Army Aberdeen Proving Ground (APG)

TABLE OF CONTENTS

		<u>PAGE</u>
	ACKNOWLEDGMENTS	i
	SECTION 1. GENERAL INFORMATION	
1.1 1.2	BACKGROUND	1 1 1 3
1.3	STANDARD AND NONSTANDARD INERT ORDNANCE TARGETS	4
	SECTION 2. DEMONSTRATION	
2.1	DEMONSTRATOR INFORMATION 2.1.1 Demonstrator Point of Contact (POC) and Address 2.1.2 System Description 2.1.3 Data Processing Description 2.1.4 Data Submission Format 2.1.5 Demonstrator Quality Assurance (QA) and Quality Control (QC) 2.1.6 Additional Records YPG SITE INFORMATION	5 5 6 6 6 7
۷.2	2.2.1 Location	7 7 8
3.1	DATE OF FIELD ACTIVITIES	9
3.2 3.3	AREAS TESTED/NUMBER OF HOURS TEST CONDITIONS 3.3.1 Weather Conditions 3.3.2 Field Conditions 3.3.3 Soil Moisture	9 9 9 9
3.4	FIELD ACTIVITIES 3.4.1 Setup/Mobilization 3.4.2 Calibration 3.4.3 Downtime Occasions 3.4.4 Data Collection 3.4.5 Demobilization	10 10 10 10 10
3.5	PROCESSING TIME	11
3.6	DEMONSTRATOR'S FIELD PERSONNEL	11
3.7	DEMONSTRATOR'S FIELD SURVEYING METHOD	11
3.8	SUMMARY OF DAILY LOGS	11

SECTION 4. TECHNICAL PERFORMANCE RESULTS

		<u>PAGE</u>
4.1	ROC CURVES USING ALL ORDNANCE CATEGORIES	13
4.2	ROC CURVES USING ORDNANCE LARGER THAN 20 MM	13
4.3	PERFORMANCE SUMMARIES	13
4.4	EFFICIENCY, REJECTION RATES, AND TYPE CLASSIFICATION	15
4.5	LOCATION ACCURACY	15
	SECTION 5. ON-SITE LABOR COSTS	
<u>S</u>	ECTION 6. COMPARISON OF RESULTS TO OPEN FIELD DEMONSTRAT	<u> </u>
6.1	SUMMARY OF RESULTS FROM OPEN FIELD DEMONSTRATION	19
6.2	COMPARISON OF ROC CURVES USING ALL ORDNANCE	
	CATEGORIES	19
6.3	COMPARISON OF ROC CURVES USING ORDNANCE LARGER THAN	
	20 MM	19
6.4	STATISTICAL COMPARISONS	20
	SECTION 7. APPENDIXES	
Α	TERMS AND DEFINITIONS	A-1,
В	DAILY WEATHER LOGS	B-1
C	SOIL MOISTURE	C-1
D	DAILY ACTIVITY LOGS	D-1
E	REFERENCES	E-1
F	ABBREVIATIONS	F-1
C	DISTRIBITION LIST	G-1

SECTION 1. GENERAL INFORMATION

1.1 BACKGROUND

Technologies under development for the detection and discrimination of unexploded ordnance (UXO) require testing so that their performance can be characterized. To that end, Standardized Test Sites have been developed at Aberdeen Proving Ground (APG), Maryland and U.S. Army Yuma Proving Ground (YPG), Arizona. These test sites provide a diversity of geology, climate, terrain, and weather as well as diversity in ordnance and clutter. Testing at these sites is independently administered and analyzed by the government for the purposes of characterizing technologies, tracking performance with system development, comparing performance of different systems, and comparing performance in different environments.

The Standardized UXO Technology Demonstration Site Program is a multi-agency program spearheaded by the U.S. Army Environmental Center (AEC). The U.S. Army Aberdeen Test Center (ATC) and the U.S. Army Corps of Engineers Engineering Research and Development Center (ERDC) provide programmatic support. The program is being funded and supported by the Environmental Security Technology Certification Program (ESTCP), the Strategic Environmental Research and Development Program (SERDP) and the Army Environmental Quality Technology Program (EQT).

1.2 SCORING OBJECTIVES

The objective in the Standardized UXO Technology Demonstration Site Program is to evaluate the detection and discrimination capabilities of a given technology under various field and soil conditions. Inert munitions and clutter items are positioned in various orientations and depths in the ground.

The evaluation objectives are as follows:

- a. To determine detection and discrimination effectiveness under realistic scenarios that vary targets, geology, clutter, topography, and vegetation.
 - b. To determine cost, time, and manpower requirements to operate the technology.
- c. To determine demonstrator's ability to analyze survey data in a timely manner and provide prioritized "Target Lists" with associated confidence levels.
- d. To provide independent site management to enable the collection of high quality, ground-truth, geo-referenced data for post-demonstration analysis.

1.2.1 Scoring Methodology

a. The scoring of the demonstrator's performance is conducted in two stages. These two stages are termed the RESPONSE STAGE and DISCRIMINATION STAGE. For both stages, the probability of detection (P_d) and the false alarms are reported as receiver-operating

characteristic (ROC) curves. False alarms are divided into those anomalies that correspond to emplaced clutter items, measuring the probability of false positive (P_{fp}), and those that do not correspond to any known item, termed background alarms.

- b. The RESPONSE STAGE scoring evaluates the ability of the system to detect emplaced targets without regard to ability to discriminate ordnance from other anomalies. For the blind grid RESPONSE STAGE, the demonstrator provides the scoring committee with a target response from each and every grid square along with a noise level below which target responses are deemed insufficient to warrant further investigation. This list is generated with minimal processing and, since a value is provided for every grid square, will include signals both above and below the system noise level.
- c. The DISCRIMINATION STAGE evaluates the demonstrator's ability to correctly identify ordnance as such and to reject clutter. For the blind grid DISCRIMINATION STAGE, the demonstrator provides the scoring committee with the output of the algorithms applied in the discrimination-stage processing for each grid square. The values in this list are prioritized based on the demonstrator's determination that a grid square is likely to contain ordnance. Thus, higher output values are indicative of higher confidence that an ordnance item is present at the specified location. For digital signal processing, priority ranking is based on algorithm output. For other discrimination approaches, priority ranking is based on human (subjective) judgment. The demonstrator also specifies the threshold in the prioritized ranking that provides optimum performance, (i.e. that is expected to retain all detected ordnance and rejects the maximum amount of clutter).
- d. The demonstrator is also scored on EFFICIENCY and REJECTION RATIO, which measures the effectiveness of the discrimination stage processing. The goal of discrimination is to retain the greatest number of ordnance detections from the anomaly list, while rejecting the maximum number of anomalies arising from non-ordnance items. EFFICIENCY measures the fraction of detected ordnance retained after discrimination, while the REJECTION RATIO measures the fraction of false alarms rejected. Both measures are defined relative to performance at the demonstrator-supplied level below which all responses are considered noise, i.e., the maximum ordnance detectable by the sensor and its accompanying false positive rate or background alarm rate.
- e. Based on configuration of the ground truth at the standardized sites and the defined scoring methodology, there exists the possibility of having anomalies within overlapping halos and/or multiple anomalies within halos. In these cases, the following scoring logic is implemented:
- (1) In situations where multiple anomalies exist within a single R_{halo} , the anomaly with the strongest response or highest ranking will be assigned to that particular ground truth item.
- (2) For overlapping R_{halo} situations, ordnance has precedence over clutter. The anomaly with the strongest response or highest ranking that is closest to the center of a particular ground truth item gets assigned to that item. Remaining anomalies are retained until all matching is complete.

- (3) Anomalies located within any R_{halo} that do not get associated with a particular ground truth item are thrown out and are not considered in the analysis.
- f. All scoring factors are generated utilizing the Standardized UXO Probability and Plot Program, version 3.1.1.

1.2.2 Scoring Factors

Factors to be measured and evaluated as part of this demonstration include:

- a. Response Stage ROC curves:
- (1) Probability of Detection (P_d res).
- (2) Probability of False Positive (P_{fp} res).
- (3) Background Alarm Rate (BAR^{res}) or Probability of Background Alarm (P_{BA}^{res}).
- b. Discrimination Stage ROC curves:
- (1) Probability of Detection (P_d^{disc}).
- (2) Probability of False Positive (Pfp disc).
- (3) Background Alarm Rate (BAR^{disc}) or Probability of Background Alarm (P_{BA}^{disc}).
- c. Metrics:
- (1) Efficiency (E).
- (2) False Positive Rejection Rate (R_{fp}) .
- (3) Background Alarm Rejection Rate (RBA).
- d. Other:
- (1) Probability of Detection by Size and Depth.
- (2) Classification by type (i.e., 20-, 40-, 105-mm, etc.).
- (3) Location accuracy.
- (4) Equipment setup, calibration time and corresponding man-hour requirements.
- (5) Survey time and corresponding man-hour requirements.

- (6) Reacquisition/resurvey time and man-hour requirements (if any).
- (7) Downtime due to system malfunctions and maintenance requirements.

1.3 STANDARD AND NONSTANDARD INERT ORDNANCE TARGETS

The standard and nonstandard ordnance items emplaced in the test areas are listed in Table 1. Standardized targets are members of a set of specific ordnance items that have identical properties to all other items in the set (caliber, configuration, size, weight, aspect ratio, material, filler, magnetic remanence, and nomenclature). Nonstandard targets are inert ordnance items having properties that differ from those in the set of standardized targets.

TABLE 1. INERT ORDNANCE TARGETS

Standard Type	Nonstandard (NS)
20-mm Projectile M55	20-mm Projectile M55
	20-mm Projectile M97
40-mm Grenades M385	40-mm Grenades M385
40-mm Projectile MKII Bodies	40-mm Projectile M813
BDU-28 Submunition	
BLU-26 Submunition	
M42 Submunition	
57-mm Projectile APC M86	
60-mm Mortar M49A3	60-mm Mortar (JPG)
	60-mm Mortar M49
2.75-inch Rocket M230	2.75-inch Rocket M230
	2.75-inch Rocket XM229
MK 118 ROCKEYE	
81-mm Mortar M374	81-mm Mortar (JPG)
	81-mm Mortar M374
105-mm HEAT Rounds M456	
105-mm Projectile M60	105-mm Projectile M60
155-mm Projectile M483A1	155-mm Projectile M483A
	500-lb Bomb

JPG = Jefferson Proving Ground HEAT = high-explosive antitank

SECTION 2. DEMONSTRATION

2.1 DEMONSTRATOR INFORMATION

2.1.1 Demonstrator Point of Contact (POC) and Address

POC: Mr. Scott Hemstreet

301-705-5044

shemstreet@hfactors.com

Address: Human Factors Applications, Inc.

8 Jay Gould Court, Unit D Waldorf, MD 20602

2.1.2 System Description (provided by demonstrator)

Schonstedt 52Cx Ordnance Locator. Schonstedt Magnetometers are ferrous metal locators and will only detect "iron" or magnetic materials (fig. 1). The size and orientation of the target and the soil characteristics of the work area limit the depth of detection. The instrument is not capable of classifying the anomaly; it will only indicate the presence or absence of a magnetic anomaly.

Schonstedt Magnetometers do not require calibration. They have a simple battery function test and a "Go"/"No Go" field operational check. The magnetometers will be set in accordance with the manufacturer's handbook to the sensitivity required to detect subsurface anomalies on the project site.



Figure 1. Demonstrator's system, Magnetometer Schonstedt/hand held.

2.1.3 <u>Data Processing Description (provided by demonstrator)</u>

The Human Factors Applications, Inc. (HFA) UXO team will place a plastic pin flag in the ground to record the location of a subsurface anomaly. ATC personnel will survey in the location of this flag to determine the accuracy of the "MAG and Flag" process.

2.1.4 <u>Data Submission Format</u>

Data were submitted for scoring in accordance with data submission protocols outlined in the Standardized UXO Technology Demonstration Site Handbook. These submitted data are not included in this report in order to protect ground truth information.

2.1.5 <u>Demonstrator Quality Assurance (QA) and Quality Control (QC) (provided by demonstrator)</u>

Magnetometer(s) will be tested daily before starting UXO operations in the morning. The UXO Technician III will perform random checks during daily operations to ensure the equipment is operating and being operated properly. If a magnetometer does not pass the daily check, it will be repaired or replaced.

The Master Rated UXO Technician (UXO Technician III) will perform a random QC survey over the entire project site. This random survey will include a 100 percent survey of a 10' radius around all sites where ordnance items have been located. If an ordnance item is discovered during the QC survey, 100 percent of the site will be resurveyed.

Overview of Quality Assurance (QA): Test site to compare flagged anomaly locations to known locations of test items.

2.1.6 Additional Records

The following record(s) by this vendor can be accessed via the Internet as MicroSoft Word documents at www.uxotestsites.org. The counterparts to this report are the Blind Grid, Scoring Record No. 238, the Open Field, Scoring Record No. 442, and the Desert Extreme, Scoring Record No. No. 528.

2.2 YPG SITE INFORMATION

2.2.1 Location

YPG is located adjacent to the Colorado River in the Sonoran Desert. The UXO Standardized Test Site is located south of Pole Line Road and east of the Countermine Testing and Training Range. The Open Field range, Calibration Grid, Blind Grid, Mogul area, and Desert Extreme area comprise the 350 by 500-meter general test site area. The open field site is the largest of the test sites and measures approximately 200 by 350 meters. To the east of the open field range are the calibration and blind test grids that measure 30 by 40 meters and 40 by 40 meters, respectively. South of the Open Field is the 135- by 80-meter Mogul area consisting of a sequence of man-made depressions. The Desert Extreme area is located southeast of the open field site and has dimensions of 50 by 100 meters. The Desert Extreme area, covered with desert-type vegetation, is used to test the performance of different sensor platforms in a more severe desert conditions/environment.

2.2.2 Soil Type

Soil samples were collected at the YPG UXO Standardized Test Site by ERDC to characterize the shallow subsurface (< 3 m). Both surface grab samples and continuous soil borings were acquired. The soils were subjected to several laboratory analyses, including sieve/hydrometer, water content, magnetic susceptibility, dielectric permittivity, X-ray diffraction, and visual description.

There are two soil complexes present within the site, Riverbend-Carrizo and Cristobal-Gunsight. The Riverbend-Carrizo complex is comprised of mixed stream alluvium, whereas the Cristobal-Gunsight complex is derived from fan alluvium. The Cristobal-Gunsight complex covers the majority of the site. Most of the soil samples were classified as either a sandy loam or loamy sand, with most samples containing gravel-size particles. All samples had a measured water content less than 7 percent, except for two that contained 11-percent moisture. The majority of soil samples had water content between 1 to 2 percent. Samples containing more than 3 percent were generally deeper than 1 meter.

An X-ray diffraction analysis on four soil samples indicated a basic mineralogy of quartz, calcite, mica, feldspar, magnetite, and some clay. The presence of magnetite imparted a moderate magnetic susceptibility, with volume susceptibilities generally greater than 100 by 10-5 SI.

For more details concerning the soil properties at the YPG test site, go to www.uxotestsites.org on the web to view the entire soils description report.

2.2.3 Test Areas

A description of the test site areas at YPG is included in Table 2.

TABLE 2. TEST SITE AREAS

Area	Description
Calibration Grid	Contains the 15 standard ordnance items buried in six positions at
4	various angles and depths to allow demonstrator equipment
	calibration.
Blind Grid	Contains 400 grid cells in a 0.16-hectare (0.39-acre) site. The center
	of each grid cell contains ordnance, clutter, or nothing.
Open Field	A 4-hectare (10-acre) site containing open areas, dips, ruts, and
	obstructions, including vegetation.
Mogul	A 2.64 area consisting of two areas (the rectangular or driving portion
,	of the course and the triangular section with more difficult, non-
	drivable terrain). A series of craters (as deep as 0.91m) and
	trenches (as deep as 0.91m) encompass this section.

SECTION 3. FIELD DATA

3.1 DATE OF FIELD ACTIVITIES (11 and 12 May 2004)

3.2 AREAS TESTED/NUMBER OF HOURS

Areas tested and total number of hours operated at each site are summarized in Table 3.

TABLE 3. AREAS TESTED AND NUMBER OF HOURS

Area	Number of Hours
Calibration Lanes	12.75
Mogul	27.83

3.3 TEST CONDITIONS

3.3.1 Weather Conditions

A YPG weather station located approximately one mile west of the test site was used to record average temperature and precipitation on a half hour basis for each day of operation. The temperatures listed in Table 4 represent the average temperature during field operations from 0700 to 1700 hours while precipitation data represents a daily total amount of rainfall. Hourly weather logs used to generate this summary are provided in Appendix B.

TABLE 4. TEMPERATURE/PRECIPITATION DATA SUMMARY

Date, 2004	Average Temperature, °C	Total Daily Precipitation, in.
11 May	28.2	N/A
12 May	27.2	N/A

3.3.2 Field Conditions

The field was dry and the weather was warm throughout the HFA survey.

3.3.3 Soil Moisture

Three soil probes were placed at various locations within the site to capture soil moisture data: Blind Grid, Calibration, Desert Extreme, and Open Field areas. Measurements were collected in percent moisture and were taken twice daily (morning and afternoon) from five different soil depths (1 to 6 in., 6 to 12 in., 12 to 24 in., 24 to 36 in., and 36 to 48 in.) from each probe. Soil moisture logs are included in Appendix C.

3.4 FIELD ACTIVITIES

3.4.1 Setup/Mobilization

These activities included initial mobilization and daily equipment preparation and break down. A two-person crew took 1-hour and 20 minutes to perform the initial setup and mobilization. There was 9 hours and 42 minutes of daily equipment preparation and end of the day equipment break down lasted 1-hour and 41 minutes.

3.4.2 Calibration

HFA spent a total of 12 hours and 45 minutes in the calibration lanes, of which 8 hours and 52 minutes was spent collecting data.

3.4.3 Downtime Occasions

Occasions of downtime are grouped into five categories: equipment/data checks or equipment maintenance, equipment failure and repair, weather, Demonstration Site issues, or breaks/lunch. All downtime is included for the purposes of calculating labor costs (section 5) except for downtime due to Demonstration Site issues. Demonstration Site issues, while noted in the Daily Log, are considered non-chargeable downtime for the purposes of calculating labor costs and are not discussed. Breaks and lunches are discussed in this section and billed to the total Site Survey area.

- **3.4.3.1** Equipment/data checks, maintenance. Equipment data checks and maintenance activities accounted for no site usage time. These activities included changing out batteries and routine data checks to ensure the data was being properly recorded/collected. HFA spent an additional 4 hours and 48 minutes for breaks and lunches.
- **3.4.3.2** Equipment failure or repair. No time was needed to resolve equipment failures that occurred while surveying the Mogul.
- **3.4.3.3** Weather. No weather delays occurred during the survey.

3.4.4 Data Collection

spent a total time of 27 hours and 50 minutes in the Mogul area, 11 hours and 39 minutes of which was spent collecting data.

3.4.5 <u>Demobilization</u>

The HFA survey crew went on to conducted a full demonstration of the site. Therefore, demobilization did not occur until 13 May 2004. On that day, it took the crew 4 hours to break down and pack up their equipment.

3.5 PROCESSING TIME

HFA submitted the raw data from the demonstration activities on the last day of the demonstration, as required. The scoring submittal data was also provided within the required 30-day timeframe.

3.6 DEMONSTRATOR'S FIELD PERSONNEL

Bob Dyminski Scott Helmstreet

3.7 DEMONSTRATOR'S FIELD SURVEYING METHOD

HFA laid out grids throughout the moguls and collected data in a linear fashion and in a south to north direction.

3.8 SUMMARY OF DAILY LOGS

Daily logs capture all field activities during this demonstration and are located in Appendix D. Activities pertinent to this specific demonstration are indicated in highlighted text.

SECTION 4. TECHNICAL PERFORMANCE RESULTS

4.1 ROC CURVES USING ALL ORDNANCE CATEGORIES

(Not applicable for this technology)

4.2 ROC CURVES USING ORDNANCE LARGER THAN 20 MM

(Not applicable for this technology)

4.3 PERFORMANCE SUMMARIES

Results for the Mogul Area test, broken out by size, depth and nonstandard ordnance, are presented in Tables 5a and 5b (for cost results, see section 5). Results by size and depth include both standard and nonstandard ordnance. The results by size show how well the demonstrator did at detecting/discriminating ordnance of a certain caliber range (see app A for size definitions). The results are relative to the number of ordnances emplaced. Depth is measured from the geometric center of anomalies.

The RESPONSE STAGE results are derived from the list of anomalies above the demonstrator-provided noise level. The results for the DISCRIMINATION STAGE are derived from the demonstrator's recommended threshold for optimizing UXO field cleanup by minimizing false digs and maximizing ordnance recovery. The lower 90-percent confidence limit on probability of detection and probability of false positive was calculated assuming that the number of detections and false positives are binomially distributed random variables. All results in Tables 5a and 5b have been rounded to protect the ground truth. However, lower confidence limits were calculated using actual results.

The overall ground truth is composed of ferrous and non-ferrous anomalies. Due to limitations of the magnetometer, the non-ferrous items cannot be detected. Therefore, the summary presented in Table 5a exhibits results based on the subset of the ground truth that is solely the ferrous anomalies. Table 5b exhibits results based on the full ground truth. All other tables presented in this section are based on scoring against the ferrous only ground truth. The response stage noise level and recommended discrimination stage threshold values are provided by the demonstrator.

TABLE 5a. SUMMARY OF MOGUL RESULTS (FERROUS ONLY)

				By Size				By Depth, 1	n
Metric	Overall	Standard	Nonstandard	Small	Medium	Large	< 0.3	0.3 to <1	>= 1
			RESPONSE S	TAGE					
P_d	0.60	0.60	0.65	0.60	0.60	0.65	0.70	0.50	0.30
Pd Low 90% Conf	0.55	0.51	0.52	0.49	0.50	0.46	0.63	0.36	0.08
P _d Upper 90% Conf	0.68	0.69	0.74	0.70	0.73	0.80	0.80	0.61	0.60
P_{fp}	0.80	-	-	-	-	-	0.85	0.60	0.50
Pfp Low 90% Conf	0.77	-	•		-	-	0.82	0.49	0.05
P _{fp} Upper 90% Conf	0.84	-	-	-	-	-	0.90	0.71	0.95
BAR	0.25	-	-		-	-	-	-	-
			DISCRIMINATIO	N STAG	E				
P_d	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
P _d Low 90% Conf	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
P _d Upper 90% Conf	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
P_{fp}	N/A	-	-	-	-	-	N/A	N/A	N/A
P _{fp} Low 90% Conf	N/A	-	-	-	-	_	N/A	N/A	N/A
P _{fp} Upper 90% Conf	N/A	-	-	-	-	-	N/A	N/A	N/A
BAR	N/A	-	-	-	-	-	_	-	-

Response Stage Noise Level: 0.00

Recommended Discrimination Stage Threshold: 0.00

TABLE 5b. SUMMARY OF MOGUL RESULTS (FULL GROUND TRUTH)

				By Size			By Depth, m		
Metric	Overall	Standard	Nonstandard	Small	Medium	Large	< 0.3	0.3 to <1	>= 1
			RESPONSE S	TAGE					
P_d	0.55	0.50	0.60	0.45	0.60	0.65	0.60	0.40	0.30
Pd Low 90% Conf	0.46	0.41	0.47	0.35	0.50	0.46	0.52	0.30	0.08
P _d Upper 90% Conf	0.59	0.57	0.68	0.53	0.73	0.80	0.68	0.54	0.60
P _{fp}	0.80	•	-	-	-	•	0.85	0.60	0.50
P _{fp} Low 90% Conf	0.77		-	-	-	-	0.82	0.49	0.05
P _{fp} Upper 90% Conf	0.84	-	-	-	-	-	0.90	0.71	0.95
BAR	0.25	-	-	-	-	-	-	-	-
			DISCRIMINATIO	N STAG	E				
P_d	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
P _d Low 90% Conf	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
P _d Upper 90% Conf	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
P_{fp}	N/A	-	•	-	-	-	N/A	N/A	N/A
P _{fp} Low 90% Conf	N/A	-		-	-	-	N/A	N/A	N/A
P _{fp} Upper 90% Conf	N/A	-	-	-	-	-	N/A	N/A	N/A
BAR	N/A	-	•	-	-	-	-	-	-

Response Stage Noise Level: 0.00

Recommended Discrimination Stage Threshold 0.00

Note: The recommended discrimination stage threshold values are provided by the demonstrator.

No discrimination algorithm was applied. Therefore, the discrimination

stage results are not applicable.

4.4 EFFICIENCY, REJECTION RATES, AND TYPE CLASSIFICATION

Due to technical limitations of the system used for this demonstration, no attempt was made to discriminate. Therefore, the following tables presented in this section are not applicable.

Efficiency and rejection rates are calculated to quantify the discrimination ability at specific points of interest on the ROC curve: (1) at the point where no decrease in P_d is suffered (i.e., the efficiency is by definition equal to one) and (2) at the operator selected threshold. These values are reported in Table 6.

TABLE 6. EFFICIENCY AND REJECTION RATES

	Efficiency (E)	False Positive Rejection Rate	Background Alarm Rejection Rate
At Operating Point	N/A	N/A	N/A
With No Loss of Pd	N/A	N/A	N/A

At the demonstrator's recommended setting, the ordnance items that were detected and correctly discriminated were further scored on whether their correct type could be identified (table 7). Correct type examples include "20-mm projectile, 105-mm HEAT Projectile, and 2.75-inch Rocket". A list of the standard type declaration required for each ordnance item was provided to demonstrators prior to testing. For example, the standard type for the three example items are 20mmP, 105H, and 2.75in, respectively.

TABLE 7. CORRECT TYPE CLASSIFICATION
OF TARGETS CORRECTLY
DISCRIMINATED AS UXO

Size	Percentage Correct
Small	N/A
Medium	N/A
Large	N/A
Overall	N/A

4.5 LOCATION ACCURACY

The mean location error and standard deviations appear in Table 8. These calculations are based on average missed depth for ordnance correctly identified in the discrimination stage. Depths are measured from the closest point of the ordnance to the surface. For the Blind Grid, only depth errors are calculated, since (X, Y) positions are known to be the centers of each grid square.

TABLE 8. MEAN LOCATION ERROR AND STANDARD DEVIATION (M)

	Mean	Standard Deviation
Northing	-0.06	0.14
Easting	0.00	0.12
Depth	N/A	N/A

Note: Demonstrator did not attempt to declare depth of detection.

SECTION 5. ON-SITE LABOR COSTS

A standardized estimate for labor costs associated with this effort was calculated as follows: the first person at the test site was designated "supervisor", the second person was designated "data analyst", and the third and following personnel were considered "field support". Standardized hourly labor rates were charged by title: supervisor at \$95.00/hour, data analyst at \$57.00/hour, and field support at \$28.50/hour.

Government representatives monitored on-site activity. All on-site activities were grouped into one of ten categories: initial setup/mobilization, daily setup/stop, calibration, collecting data, downtime due to break/lunch, downtime due to equipment failure, downtime due to equipment/data checks or maintenance, downtime due to weather, downtime due to demonstration site issue, or demobilization. See Appendix D for the daily activity log. See section 3.4 for a summary of field activities.

The standardized cost estimate associated with the labor needed to perform the field activities is presented in Table 9. Note that calibration time includes time spent in the Calibration Lanes as well as field calibrations. "Site survey time" includes daily setup/stop time, collecting data, breaks/lunch, downtime due to equipment/data checks or maintenance, downtime due to failure, and downtime due to weather.

TABLE 9. ON-SITE LABOR COSTS

	No. People	Hourly Wage	Hours	Cost
		Initial Setup		
Supervisor	1	\$95.00	1.33	\$126.35
Data Analyst	1	57.00	1.33	75.81
Field Support	0	28.50	1.33	0.00
SubTotal				\$202.16
		Calibration		
Supervisor	1	\$95.00	12.75	\$1,211.25
Data Analyst	1	57.00	12.75	726.75
Field Support	0	28.50	12.75	0.00
SubTotal				\$1,938.00
		Site Survey		
Supervisor	1	\$95.00	27.83	\$2,643.85
Data Analyst	1	57.00	27.83	1,586.31
Field Support	0	28.50	27.83	0.00
SubTotal				\$4,230.16

See notes at end of table.

TABLE 9 (CONT'D)

	No. People	Hourly Wage	Hours	Cost
		Demobilization		
Supervisor	1	\$95.00	4.0	\$380.00
Data Analyst	0	57.00	4.0	0.00
Field Support	0	28.50	4.0	0.00
Subtotal				\$380.00
Total				\$6,750.32

Notes: Calibration time includes time spent in the Calibration Lanes as well as calibration before each data run.

Site Survey time includes daily setup/stop time, collecting data, breaks/lunch, downtime due to system maintenance, failure, and weather.

SECTION 6. COMPARISON OF RESULTS TO OPEN FIELD DEMONSTRATION (BASED ON FERROUS ONLY GROUND TRUTH)

6.1 SUMMARY OF RESULTS FROM OPEN FIELD DEMONSTRATION

Table 10 shows the results from the Open Field survey conducted prior to surveying the Moguls during the same site visit in May of 2004. Due to the system utilizing magnetometer type sensors, all results presented in the following section have been based on performance scoring against the ferrous only ground truth anomalies. For more details on the Open Field survey results reference section 2.1.6.

TABLE 10. SUMMARY OF OPEN FIELD RESULTS FOR THE MAGNETOMETER SCHONSTEDT/HAND HELD (FERROUS ONLY)

				By Size		By Depth, m		n	
Metric	Overall	Standard	Nonstandard	Small	Medium	Large	< 0.3	0.3 to <1	>= 1
			RESPONSE ST	FAGE					
P_{d}	0.45	0.50	0.50	0.45	0.50	0.65	0.55	0.55	0.15
Pd Low 90% Conf	0.44	0.48	0.45	0.41	0.45	0.57	0.50	0.49	0.08
P _d Upper 90% Conf	0.50	0.56	0.54	0.50	0.56	0.71	0.59	0.60	0.25
P _{fp}	0.25	•		-	-	-	0.65	0.60	0.00
P _{fp} Low 90% Conf	0.22	•	*	-	-	-	0.61	0.54	0.00
P _{fp} Upper 90% Conf	0.25	-	•	-	-	-	0.65	0.61	0.21
BAR	0.50	-	•	-	-	-	-	-	-
			DISCRIMINATIO	N STAG	E				
P_d	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
P _d Low 90% Conf	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
P _d Upper 90% Conf	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
P_{fp}	N/A	-	-	-	-	-	N/A	N/A	N/A
P _{fp} Low 90% Conf	N/A	-	-	-	•	-	N/A	N/A	N/A
P _{fp} Upper 90% Conf	N/A	-	-	-	-	-	N/A	N/A	N/A
BAR	N/A	-	-	-		-	-	-	-

6.2 COMPARISON OF ROC CURVES USING ALL ORDNANCE CATEGORIES

(Not applicable for this technology)

6.3 COMPARISON OF ROC CURVES USING ORDNANCE LARGER THAN 20 MM

(Not applicable for this technology)

6.4 STATISTICAL COMPARISONS

Statistical Chi-square significance tests were used to compare results between the Open Field and Mogul Area scenarios. The intent of the comparison is to determine if the feature introduced in each scenario has a degrading effect on the performance of the sensor system. However, any modifications in the UXO sensor system during the test, like changes in the processing or changes in the selection of the operating threshold, will also contribute to performance differences.

The Chi-square test for comparison between ratios was used at a significance level of 0.05 to compare Open Field to Mogul Area with regard to P_d^{res} , P_d^{disc} , P_{fp}^{res} and P_{fp}^{disc} , Efficiency and Rejection Rate. These results are presented in Table 11. A detailed explanation and example of the Chi-square application is located in Appendix A.

TABLE 11. CHI-SQUARE RESULTS - OPEN FIELD VERSUS MOGUL

Metric	Small	Medium	Large	Overall
P _d res	Not Significant	Not Significant	Not Significant	Significant
P _d disc	N/A	N/A	N/A	N/A
P _{fp} res	Not Significant	Not Significant	Not Significant	Not Significant
P _{fp} res P _{fp} disc	-	-	_	N/A
Efficiency	-	_	_	N/A
Rejection rate	-	-	_	N/A

SECTION 7. APPENDIXES

APPENDIX A. TERMS AND DEFINITIONS

GENERAL DEFINITIONS

Anomaly: Location of a system response deemed to warrant further investigation by the demonstrator for consideration as an emplaced ordnance item.

Detection: An anomaly location that is within R_{halo} of an emplaced ordnance item.

Emplaced Ordnance: An ordnance item buried by the government at a specified location in the test site.

Emplaced Clutter: A clutter item (i.e., non-ordnance item) buried by the government at a specified location in the test site.

 R_{halo} : A pre-determined radius about the periphery of an emplaced item (clutter or ordnance) within which a location identified by the demonstrator as being of interest is considered to be a response from that item. If multiple declarations lie within R_{halo} of any item (clutter or ordnance), the declaration with the highest signal output within the R_{halo} will be utilized. For the purpose of this program, a circular halo 0.5 meters in radius will be placed around the center of the object for all clutter and ordnance items less than 0.6 meters in length. When ordnance items are longer than 0.6 meters, the halo becomes an ellipse where the minor axis remains 1 meter and the major axis is equal to the length of the ordnance plus 1 meter.

Small Ordnance: Caliber of ordnance less than or equal to 40 mm (includes 20-mm projectile, 40-mm projectile, submunitions BLU-26, BLU-63, and M42).

Medium Ordnance: Caliber of ordnance greater than 40 mm and less than or equal to 81 mm (includes 57-mm projectile, 60-mm mortar, 2.75 in. Rocket, MK118 Rockeye, 81-mm mortar).

Large Ordnance: Caliber of ordnance greater than 81 mm (includes 105-mm HEAT, 105-mm projectile, 155-mm projectile, 500-pound bomb).

Shallow: Items buried less than 0.3 meter below ground surface.

Medium: Items buried greater than or equal to 0.3 meter and less than 1 meter below ground surface.

Deep: Items buried greater than or equal to 1 meter below ground surface.

Response Stage Noise Level: The level that represents the point below which anomalies are not considered detectable. Demonstrators are required to provide the recommended noise level for the Blind Grid test area.

Discrimination Stage Threshold: The demonstrator selected threshold level that they believe provides optimum performance of the system by retaining all detectable ordnance and rejecting the maximum amount of clutter. This level defines the subset of anomalies the demonstrator would recommend digging based on discrimination.

Binomially Distributed Random Variable: A random variable of the type which has only two possible outcomes, say success and failure, is repeated for n independent trials with the probability p of success and the probability 1-p of failure being the same for each trial. The number of successes x observed in the n trials is an estimate of p and is considered to be a binomially distributed random variable.

RESPONSE AND DISCRIMINATION STAGE DATA

The scoring of the demonstrator's performance is conducted in two stages. These two stages are termed the RESPONSE STAGE and DISCRIMINATION STAGE. For both stages, the probability of detection (P_d) and the false alarms are reported as receiver operating characteristic (ROC) curves. False alarms are divided into those anomalies that correspond to emplaced clutter items, measuring the probability of false positive (P_{fp}) and those that do not correspond to any known item, termed background alarms.

The RESPONSE STAGE scoring evaluates the ability of the system to detect emplaced targets without regard to ability to discriminate ordnance from other anomalies. For the RESPONSE STAGE, the demonstrator provides the scoring committee with the location and signal strength of all anomalies that the demonstrator has deemed sufficient to warrant further investigation and/or processing as potential emplaced ordnance items. This list is generated with minimal processing (e.g., this list will include all signals above the system noise threshold). As such, it represents the most inclusive list of anomalies.

The DISCRIMINATION STAGE evaluates the demonstrator's ability to correctly identify ordnance as such, and to reject clutter. For the same locations as in the RESPONSE STAGE anomaly list, the DISCRIMINATION STAGE list contains the output of the algorithms applied in the discrimination-stage processing. This list is prioritized based on the demonstrator's determination that an anomaly location is likely to contain ordnance. Thus, higher output values are indicative of higher confidence that an ordnance item is present at the specified location. For electronic signal processing, priority ranking is based on algorithm output. For other systems, priority ranking is based on human judgment. The demonstrator also selects the threshold that the demonstrator believes will provide "optimum" system performance, (i.e., that retains all the detected ordnance and rejects the maximum amount of clutter).

Note: The two lists provided by the demonstrator contain identical numbers of potential target locations. They differ only in the priority ranking of the declarations.

RESPONSE STAGE DEFINITIONS

Response Stage Probability of Detection (P_d^{res}) : $P_d^{res} = (No. of response-stage detections)/(No. of emplaced ordnance in the test site).$

Response Stage False Positive (fp^{res}): An anomaly location that is within R_{halo} of an emplaced clutter item.

Response Stage Probability of False Positive (P_{fp}^{res}): P_{fp}^{res} = (No. of response-stage false positives)/(No. of emplaced clutter items).

Response Stage Background Alarm (ba^{res}): An anomaly in a blind grid cell that contains neither emplaced ordnance nor an emplaced clutter item. An anomaly location in the open field or scenarios that is outside R_{halo} of any emplaced ordnance or emplaced clutter item.

Response Stage Probability of Background Alarm (P_{ba}^{res}): Blind Grid only: $P_{ba}^{res} =$ (No. of response-stage background alarms)/(No. of empty grid locations).

Response Stage Background Alarm Rate (BAR^{res}): Open Field only: BAR^{res} = (No. of response-stage background alarms)/(arbitrary constant).

Note that the quantities P_d^{res} , P_{fp}^{res} , P_{ba}^{res} , and BAR^{res} are functions of t^{res} , the threshold applied to the response-stage signal strength. These quantities can therefore be written as $P_d^{res}(t^{res})$, $P_{fp}^{res}(t^{res})$, $P_{ba}^{res}(t^{res})$, and $BAR^{res}(t^{res})$.

DISCRIMINATION STAGE DEFINITIONS

Discrimination: The application of a signal processing algorithm or human judgment to response-stage data that discriminates ordnance from clutter. Discrimination should identify anomalies that the demonstrator has high confidence correspond to ordnance, as well as those that the demonstrator has high confidence correspond to nonordnance or background returns. The former should be ranked with highest priority and the latter with lowest.

Discrimination Stage Probability of Detection (P_d^{disc}) : $P_d^{disc} = (No. of discrimination-stage detections)/(No. of emplaced ordnance in the test site).$

Discrimination Stage False Positive (fp^{disc}): An anomaly location that is within R_{halo} of an emplaced clutter item.

Discrimination Stage Probability of False Positive (P_{fp}^{disc}): P_{fp}^{disc} = (No. of discrimination stage false positives)/(No. of emplaced clutter items).

Discrimination Stage Background Alarm (ba^{disc}): An anomaly in a blind grid cell that contains neither emplaced ordnance nor an emplaced clutter item. An anomaly location in the open field or scenarios that is outside R_{balo} of any emplaced ordnance or emplaced clutter item.

Discrimination Stage Probability of Background Alarm (P_{ba}^{disc}): $P_{ba}^{disc} = (No. of discrimination-stage background alarms)/(No. of empty grid locations).$

Discrimination Stage Background Alarm Rate (BAR^{disc}): BAR^{disc} = (No. of discrimination-stage background alarms)/(arbitrary constant).

Note that the quantities P_d^{disc} , P_{fp}^{disc} , P_{ba}^{disc} , and BAR^{disc} are functions of t^{disc} , the threshold applied to the discrimination-stage signal strength. These quantities can therefore be written as $P_d^{disc}(t^{disc})$, $P_{fp}^{disc}(t^{disc})$, $P_{ba}^{disc}(t^{disc})$, and $BAR^{disc}(t^{disc})$.

RECEIVER-OPERATING CHARACERISTIC (ROC) CURVES

ROC curves at both the response and discrimination stages can be constructed based on the above definitions. The ROC curves plot the relationship between P_d versus P_{fp} and P_d versus BAR or P_{ba} as the threshold applied to the signal strength is varied from its minimum (t_{min}) to its maximum (t_{max}) value. Figure A-1 shows how P_d versus P_{fp} and P_d versus BAR are combined into ROC curves. Note that the "res" and "disc" superscripts have been suppressed from all the variables for clarity.

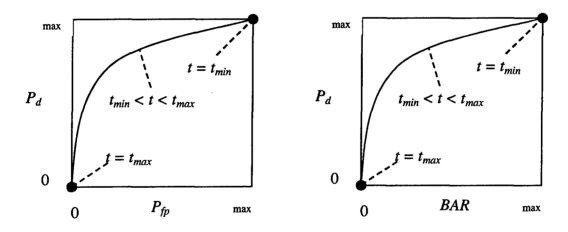


Figure A-1. ROC curves for open field testing. Each curve applies to both the response and discrimination stages.

 $^{^1}$ Strictly speaking, ROC curves plot the P_d versus P_{ba} over a pre-determined and fixed number of detection opportunities (some of the opportunities are located over ordnance and others are located over clutter or blank spots). In an open field scenario, each system suppresses its signal strength reports until some bare-minimum signal response is received by the system. Consequently, the open field ROC curves do not have information from low signal-output locations, and, furthermore, different contractors report their signals over a different set of locations on the ground. These ROC curves are thus not true to the strict definition of ROC curves as defined in textbooks on detection theory. Note, however, that the ROC curves obtained in the Blind Grid test sites are true ROC curves.

METRICS TO CHARACTERIZE THE DISCRIMINATION STAGE

The demonstrator is also scored on efficiency and rejection ratio, which measure the effectiveness of the discrimination stage processing. The goal of discrimination is to retain the greatest number of ordnance detections from the anomaly list, while rejecting the maximum number of anomalies arising from nonordnance items. The efficiency measures the amount of detected ordnance retained by the discrimination, while the rejection ratio measures the fraction of false alarms rejected. Both measures are defined relative to the entire response list, i.e., the maximum ordnance detectable by the sensor and its accompanying false positive rate or background alarm rate.

Efficiency (E): $E = P_d^{disc}(t^{disc})/P_d^{res}(t_{min}^{res})$; Measures (at a threshold of interest), the degree to which the maximum theoretical detection performance of the sensor system (as determined by the response stage tmin) is preserved after application of discrimination techniques. Efficiency is a number between 0 and 1. An efficiency of 1 implies that all of the ordnance initially detected in the response stage was retained at the specified threshold in the discrimination stage, t^{disc} .

False Positive Rejection Rate (R_{fp}) : $R_{fp} = 1 - [P_{fp}^{disc}(t^{disc})/P_{fp}^{res}(t_{min}^{res})]$; Measures (at a threshold of interest), the degree to which the sensor system's false positive performance is improved over the maximum false positive performance (as determined by the response stage tmin). The rejection rate is a number between 0 and 1. A rejection rate of 1 implies that all emplaced clutter initially detected in the response stage were correctly rejected at the specified threshold in the discrimination stage.

Background Alarm Rejection Rate (Rba):

$$\begin{aligned} &Blind\ Grid:\ R_{ba}=1-[P_{ba}^{disc}(t^{disc})\!/P_{ba}^{res}(t_{min}^{res})].\\ &Open\ Field:\ R_{ba}=1-[BAR^{disc}(t^{disc})\!/BAR^{res}(t_{min}^{res})]). \end{aligned}$$

Measures the degree to which the discrimination stage correctly rejects background alarms initially detected in the response stage. The rejection rate is a number between 0 and 1. A rejection rate of 1 implies that all background alarms initially detected in the response stage were rejected at the specified threshold in the discrimination stage.

CHI-SQUARE COMPARISON EXPLANATION:

The Chi-square test for differences in probabilities (or 2 x 2 contingency table) is used to analyze two samples drawn from two different populations to see if both populations have the same or different proportions of elements in a certain category. More specifically, two random samples are drawn, one from each population, to test the null hypothesis that the probability of event A (some specified event) is the same for both populations (ref 3).

A 2 x 2 contingency table is used in the Standardized UXO Technology Demonstration Site Program to determine if there is reason to believe that the proportion of ordnance correctly detected/discriminated by demonstrator X's system is significantly degraded by the more challenging terrain feature introduced. The test statistic of the 2 x 2 contingency table is the

Chi-square distribution with one degree of freedom. Since an association between the more challenging terrain feature and relatively degraded performance is sought, a one-sided test is performed. A significance level of 0.05 is chosen which sets a critical decision limit of 2.71 from the Chi-square distribution with one degree of freedom. It is a critical decision limit because if the test statistic calculated from the data exceeds this value, the two proportions tested will be considered significantly different. If the test statistic calculated from the data is less than this value, the two proportions tested will be considered not significantly different.

An exception must be applied when either a 0 or 100 percent success rate occurs in the sample data. The Chi-square test cannot be used in these instances. Instead, Fischer's test is used and the critical decision limit for one-sided tests is the chosen significance level, which in this case is 0.05. With Fischer's test, if the test statistic is less than the critical value, the proportions are considered to be significantly different.

Standardized UXO Technology Demonstration Site examples, where blind grid results are compared to those from the open field and open field results are compared to those from one of the scenarios, follow. It should be noted that a significant result does not prove a cause and effect relationship exists between the two populations of interest; however, it does serve as a tool to indicate that one data set has experienced a degradation in system performance at a large enough level than can be accounted for merely by chance or random variation. Note also that a result that is not significant indicates that there is not enough evidence to declare that anything more than chance or random variation within the same population is at work between the two data sets being compared.

Demonstrator X achieves the following overall results after surveying each of the three progressively more difficult areas using the same system (results indicate the number of ordnance detected divided by the number of ordnance emplaced):

Blind Grid	Open Field	Moguls
$P_d^{\text{res}} 100/100 = 1.0$	8/10 = .80	20/33 = .61
$P_d^{disc} 80/100 = 0.80$	6/10 = .60	8/33 = .24

P_d^{res}: BLIND GRID versus OPEN FIELD. Using the example data above to compare probabilities of detection in the response stage, all 100 ordnance out of 100 emplaced ordnance items were detected in the blind grid while 8 ordnance out of 10 emplaced were detected in the open field. Fischer's test must be used since a 100 percent success rate occurs in the data. Fischer's test uses the four input values to calculate a test statistic of 0.0075 that is compared against the critical value of 0.05. Since the test statistic is less than the critical value, the smaller response stage detection rate (0.80) is considered to be significantly less at the 0.05 level of significance. While a significant result does not prove a cause and effect relationship exists between the change in survey area and degradation in performance, it does indicate that the detection ability of demonstrator X's system seems to have been degraded in the open field relative to results from the blind grid using the same system.

- P_d^{disc}: BLIND GRID versus OPEN FIELD. Using the example data above to compare probabilities of detection in the discrimination stage, 80 out of 100 emplaced ordnance items were correctly discriminated as ordnance in blind grid testing while 6 ordnance out of 10 emplaced were correctly discriminated as such in open field-testing. Those four values are used to calculate a test statistic of 1.12. Since the test statistic is less than the critical value of 2.71, the two discrimination stage detection rates are considered to be not significantly different at the 0.05 level of significance.
- P_d^{res}: OPEN FIELD versus MOGULS. Using the example data above to compare probabilities of detection in the response stage, 8 out of 10 and 20 out of 33 are used to calculate a test statistic of 0.56. Since the test statistic is less than the critical value of 2.71, the two response stage detection rates are considered to be not significantly different at the 0.05 level of significance.
- P_d^{disc}: OPEN FIELD versus MOGULS. Using the example data above to compare probabilities of detection in the discrimination stage, 6 out of 10 and 8 out of 33 are used to calculate a test statistic of 2.98. Since the test statistic is greater than the critical value of 2.71, the smaller discrimination stage detection rate is considered to be significantly less at the 0.05 level of significance. While a significant result does not prove a cause and effect relationship exists between the change in survey area and degradation in performance, it does indicate that the ability of demonstrator X to correctly discriminate seems to have been degraded by the mogul terrain relative to results from the flat open field using the same system.

APPENDIX B. DAILY WEATHER LOGS

TABLE B-1. WEATHER LOG

Date	Time	Temperature, °C	Relative Humidity, %
4/19/2004	07:00	13.6	33
4/19/2004	08:00	16.9	41
4/19/2004	09:00	18.3	35
4/19/2004	10:00	20.3	30
4/19/2004	11:00	21.5	28
4/19/2004	12:00	22.9	20
4/19/2004	13:00	25.0	13
4/19/2004	14:00	25.6	12
4/19/2004	15:00	26.1	12
4/19/2004	16:00	26.1	12
4/19/2004	17:00	26.2	12
4/20/2004	07:00	14.9	36
4/20/2004	08:00	19.0	35
4/20/2004	09:00	21.0	32
4/20/2004	10:00	23.0	26
4/20/2004	11:00	25.3	19
4/20/2004	12:00	26.3	17
4/20/2004	13:00	27.1	14
4/20/2004	14:00	28.2	14
4/20/2004	15:00	28.5	15
4/20/2004	16:00	29.3	13
4/20/2004	17:00	28.8	13
4/21/2004	07:00	17.8	49
4/21/2004	08:00	20.1	44
4/21/2004	09:00	22.6	33
4/21/2004	10:00	24.8	27
4/21/2004	11:00	26.2	22
4/21/2004	12:00	27.4	22
4/21/2004	13:00	29.0	17
4/21/2004	14:00	29.7	14
4/21/2004	15:00	30.0	13
4/21/2004	16:00	31.2	12
4/21/2004	17:00	31.6	11
4/22/2004	07:00	18.4	44
4/22/2004	08:00	20.1	41
4/22/2004	09:00	22.8	28
4/22/2004	10:00	24.6	19
4/22/2004	11:00	26.0	15
4/22/2004	12:00	26.9	13
4/22/2004	13:00	27.0	12
4/22/2004	14:00	27.6	11
4/22/2004	15:00	27.5	8
4/22/2004	16:00	27.8	7
4/22/2004	17:00	27.6	5

Date	Time	Temperature, °C	Relative Humidity, %
4/23/2004	07:00	18.2	18
4/23/2004	08:00	22.4	17
4/23/2004	09:00	24.2	16
4/23/2004	10:00	25.2	16
4/23/2004	11:00	26.1	15
4/23/2004	12:00	27.2	13
4/23/2004	13:00	27.3	. 13
4/23/2004	14:00	28.0	13
4/23/2004	15:00	29.5	11
4/23/2004	16:00	29.7	10
4/23/2004	17:00	29.6	11
4/24/2004	07:00	21.7	21
4/24/2004	08:00	24.4	19
4/24/2004	09:00	26.1	17
4/24/2004	10:00	27.8	15
4/24/2004	11:00	29.0	14
4/24/2004	12:00	30.4	12
4/24/2004	12:30	31.3	11
4/24/2004	13:00	31.7	11
4/24/2004	14:00	32.0	10
4/24/2004	15:00	32.4	10
4/24/2004	16:00	32.8	10
4/24/2004	17:00	33.1	9
4/25/2004	07:00	20.2	19
4/25/2004	08:00	25.0	15
4/25/2004	09:00	27.6	13
4/25/2004	10:00	30.5	11
4/25/2004	11:00	32.0	<u>9</u> 8
4/25/2004 4/25/2004	12:00 13:00	33.6 34.8	<u>0</u>
4/25/2004	14:00	35.3	7
4/25/2004	15:00	35.4	7
4/25/2004	16:00	35.8	7
4/25/2004	17:00	35.8	6
4/26/2004	07:00	22.5	14
4/26/2004	08:00	26.3	12
4/26/2004	09:00	32.0	8
4/26/2004	10:00	32.9	7
4/26/2004	11:00	34.4	6
4/26/2004	12:00	36.0	6
4/26/2004	13:00	37.0	6
4/26/2004	14:00	37.1	6
4/26/2004	15:00	37.5	6
4/26/2004	16:00	37.5	6
4/26/2004	17:00	37.9	5

Date	Time	Temperature, °C	Relative Humidity, %
4/27/2004	7:00	28.8	9
4/27/2004	8:00	30.2	9
4/27/2004	9:00	31.0	10
4/27/2004	10:00	32.5	10
4/27/2004	11:00	32.9	9
4/27/2004	12:00	33.7	11
4/27/2004	13:00	34.6	10
4/27/2004	14:00	36.0	9
4/27/2004	15:00	37.1	9
4/27/2004	16:00	37.2	9
4/27/2004	17:00	37.3	8
4/28/2004	07:00	22.0	28
4/28/2004	08:00	26.3	24
4/28/2004	09:00	29.4	19
4/28/2004	10:00	31.1	16
4/28/2004	11:00	32.4	14
4/28/2004	12:00	34.5	10
4/28/2004	13:00	35.4	10
4/28/2004	14:00	36.1	10
4/28/2004	15:00	36.6	9
4/28/2004	16:00	36.4	10
4/28/2004	17:00	36.7	8
4/29/2004	7:00	19.3	40
4/29/2004	8:00	20.9	35
4/29/2004	9:00	23.1	31
4/29/2004	10:00	25.1	21
4/29/2004	11:00	26.9	11
4/29/2004	12:00	28.0	9
4/29/2004	13:00	28.7	8
4/29/2004	14:00	29.0	8
4/29/2004	15:00	30.0	7
4/29/2004	16:00	30.1	8
4/29/2004	17:00	29.7	7
4/30/2004	7:00	20.7	16
4/30/2004	8:00	22.6	14
4/30/2004	9:00	23.9	12
4/30/2004	10:00	25.1	11
4/30/2004	11:00	25.8	10
4/30/2004	12:00	26.3	10
4/30/2004	13:00	27.3	9
4/30/2004	14:00	28.2	11
4/30/2004	15:00	28.9	12
4/30/2004	16:00	29.6	11
4/30/2004	17:00	30.0	11

Date	Time	Temperature, °C	Relative Humidity, %
5/1/2004	07:00	24.0	17
5/1/2004	08:00	27.1	14
5/1/2004	09:00	28.1	14
5/1/2004	10:00	29.8	13
5/1/2004	11:00	30.2	12
5/1/2004	12:00	31.8	12
5/1/2004	13:00	32.8	10
5/1/2004	14:00	33.7	10
5/1/2004	15:00	34.5	9
5/1/2004	16:00	34.6	9
5/1/2004	17:00	34.7	9
5/2/2004	07:00	22.0	15
5/2/2004	08:00	28.4	12
5/2/2004	09:00	30.6	11
5/2/2004	10:00	32.8	9
5/2/2004	11:00	34.3	8
5/2/2004	12:00	35.4	8
5/2/2004	13:00	36.0	8
5/2/2004	14:00	36.9	7
5/2/2004	15:00	37.1	7
5/2/2004	16:00	37.3	6
5/2/2004	17:00	37.4	6
5/3/2004	7:00	25.8	13
5/3/2004	8:00	29.9	10
5/3/2004	9:00	32.1	8
5/3/2004	10:00	34.3	7
5/3/2004	11:00	35.6	7
5/3/2004	12:00	36.8	7
5/3/2004	13:00	37.3	7
5/3/2004	14:00	38.0	7
5/3/2004	15:00	38.9	6
5/3/2004	16:00	38.8	6
5/3/2004	17:00	38.6	6
5/4/2004	7:00	24.1	13
5/4/2004	8:00	27.9	11
5/4/2004	9:00	31.7	10
5/4/2004	10:00	34.7	9
5/4/2004	11:00	35.8	8
5/4/2004	12:00	37.0	8
5/4/2004	13:00	38.0	7
5/4/2004	14:00	38.9	6
5/4/2004	15:00	39.2	6
5/4/2004	16:00	39.1	5
5/4/2004	17:00	38.8	5

Date	Time	Temperature, °C	Relative Humidity, %
5/5/2004	07:00	24.9	17
5/5/2004	08:00	28.0	15
5/5/2004	09:00	29.9	14
5/5/2004	10:00	32.7	11
5/5/2004	11:00	33.8	10
5/5/2004	12:00	35.1	10
5/5/2004	13:00	36.4	8
5/5/2004	14:00	36.9	8
5/5/2004	15:00	37.3	8
5/5/2004	16:00	37.4	8
5/5/2004	17:00	37.2	8
5/6/2004	07:00	23.8	11
5/6/2004	08:00	29.1	9
5/6/2004	09:00	30.0	8
5/6/2004	10:00	31.8	8
5/6/2004	11:00	33.4	8
5/6/2004	12:00	34.5	8
5/6/2004	13:00	35.1	8
5/6/2004	14:00	35.8	8
5/6/2004	15:00	35.8	8
5/6/2004	16:00	35.9	8
5/6/2004	17:00	36.0	8
5/7/2004	07:00	22.6	19
5/7/2004	08:00	27.2	17
5/7/2004	09:00	30.2	13
5/7/2004	10:00	31.3	11
5/7/2004	11:00	33.1	11
5/7/2004	12:00	34.7	10
5/7/2004	13:00	35.8	10
5/7/2004	14:00	35.6	10
5/7/2004	15:00	36.2	10
5/7/2004	16:00	35.7	10
5/7/2004	17:00	35.9	9
5/8/2004	07:00	23.5	25
5/8/2004	08:00	27.6	24
5/8/2004	09:00	29.0	22
5/8/2004	10:00	31.4	17
5/8/2004	11:00	33.1	14
5/8/2004	12:00	34.4	12
5/8/2004	13:00	35.9	11
5/8/2004	14:00	36.8	10
5/8/2004	15:00	37.5	10
5/8/2004	16:00	37.7	9
5/8/2004	17:00	37.5	10

Date	Time	Temperature,	Relative
		°C	Humidity, %
5/9/2004	07:00	22.9	29
5/9/2004	08:00	27.1	21
5/9/2004	09:00	29.8	17
5/9/2004	10:00	31.5	13
5/9/2004	11:00	32.9	12
5/9/2004	12:00	34.7	10
5/9/2004	13:00	35.6	10
5/9/2004	14:00	36.5	10
5/9/2004	15:00	36.9	10
5/9/2004	16:00	37.4	9
5/9/2004	17:00	36.9	9
5/10/2004	07:00	22.5	24
5/10/2004	08:00	25.2	23
5/10/2004	09:00	28.5	22
5/10/2004	10:00	31.1	21
5/10/2004	11:00	33.0	18
5/10/2004	12:00	34.5	15
5/10/2004	13:00	35.4	15
5/10/2004	14:00	35.5	15
5/10/2004	15:00	35.9	14
5/10/2004	16:00	35.4	14
5/10/2004	17:00	35.0	14
5/11/2004	07:00	21.5	53
5/11/2004	08:00	23.0	52
5/11/2004	09:00	24.8	30
5/11/2004	10:00	26.2	28
5/11/2004	11:00	27.8	22
5/11/2004	12:00	28.9	24
5/11/2004	13:00	30.0	20
5/11/2004	14:00	30.9	20
5/11/2004	15:00	31.9	19
5/11/2004	16:00	32.4	15
5/11/2004	17:00	32.4	10
5/12/2004	7:00	20.0	38
5/12/2004	8:00	22.8	27
5/12/2004	9:00	24.9	15
5/12/2004	10:00	26.1	14
5/12/2004	11:00	27.5	13
5/12/2004	12:00	28.4	12
5/12/2004	13:00	29.1	12
5/12/2004	14:00	29.6	11
5/12/2004	15:00	29.7	10
5/12/2004	16:00	30.3	9
5/12/2004	17:00	30.3	9

APPENDIX C. SOIL MOISTURE

Date: 4/19/2004

Hours: 0950 hours, 1300 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.8	1.8
	6 to 12	2.3	2.3
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.7	1.7
	6 to 12	2.0	2.0
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.0	2.0
	12 to 24	3.5	3.5
	24 to 36	3.9	3.9
	36 to 48	4.1	4.1

Date: 4/20/2004

Times: 0705 hours, 1300 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.8	1.8
	6 to 12	2.3	2.3
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.7	1.7
	6 to 12	2.0	2.0
	12 to 24	3.6	3.6
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.6	1.6
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 4/21/2004

Times: 0700 hours, 1250 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.8	1.8
	6 to 12	2.3	2.4
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.7	1.7
	6 to 12	2.0	2.0
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
[36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.5	1.5
	6 to 12	2.1	2.2
Ī	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 4/22/2004

Times: 0705 hours, 1300 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.8	1.8
	6 to 12	2.3	2.3
	12 to 24	3.9	3.9
	24 to 36	3.6	3.6
ı	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.6	1.6
	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 4/23/2004

Times: 0625 hours, 1300 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.8	1.8
	6 to 12	2.3	2.3
•	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.5	1.5
	6 to 12	2.2	2.2
	12 to 24	3.6	3.6
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.0	2.0
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 4/26/2004

Times: 0610 hours, 1230 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.8	1.8
	6 to 12	2.3	2.3
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.5	1.5
	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.0	4.1

Date: 4/27/2004

Times: 0550 hours, 1200 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.8	1.8
	6 to 12	2.2	2.2
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.5	1.5
	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 4/28/2004

Times: 0550 hours, 1230 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.8	1.8
	6 to 12	2.3	2.3
	12 to 24	3.9	3.9
į .	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.6	1.6
_	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 4/29/2004

Times: 0550 hours, 1200 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.8	1.8
	6 to 12	2.3	2.3
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.6	1.6
	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
İ	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 4/30/2004

Times: 0600 hours, 1230 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.8	1.8
	6 to 12	2.3	2.3
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.6	1.6
	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 5/3/2004

Times: 0555 hours, 1200 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.6	1.6
	6 to 12	2.2	2.2
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.5	1.5
	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 5/4/2004

Times: 0555 hours, 1230 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.7	1.7
	6 to 12	2.3	2.3
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.6	1.6
_	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 5/5/2004

Times: 0545 hours, 1130 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.7	1.7
	6 to 12	2.3	2.3
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.6	1.6
	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 5/6/2004

Times: 0550 hours, 1145 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.8	1.8
	6 to 12	2.2	2.2
	12 to 24	3.9	3.9
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.6	1.6
-	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 5/7/2004

Times: 0550 hours, 1130 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.7	1.7
	6 to 12	2.3	2.3
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.6	1.6
·	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 5/10/2004

Times: 0600 hours, 1230 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.8	1.8
	6 to 12	2.2	2.2
	12 to 24	3.9	3.9
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.6	1.6
	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 5/11/2004

Times: 0545 hours, 1130 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.7	1.7
	6 to 12	2.3	2.3
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.6	1.6
	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 5/12/2004

Times: 0545 hours, 1130 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.8	1.8
	6 to 12	2.3	2.3
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.6	1.6
_	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: 5/12/2004

Times: 0545 hours, 1130 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.5	NA
	6 to 12	2.2	NA
	12 to 24	3.9	NA
	24 to 36	3.6	NA
·	36 to 48	4.0	NA
Mogul Area	0 to 6	1.6	NA
	6 to 12	2.1	NA
	12 to 24	3.7	NA
	24 to 36	4.0	NA
	36 to 48	4.0	NA
Desert Extreme Area	0 to 6	1.7	NA
	6 to 12	2.1	NA
	12 to 24	3.5	NA
	24 to 36	4.0	NA
	36 to 48	4.1	NA

APPENDIX D. DAILY ACTIVITY LOGS

Status Status Status Start Stop Duration,	Status Status Stop Duration,	Status Stop Duration,	Duration,				Operational Status	Track	Track Method =Other			
Date	People	Area Tested	Time	Time	mim	Operational Status	Comments	Method	Explain	Pattern	Field Conditions	nditions
04/21/2004	-	BLIND TEST GRID	1305	1510	125	COLLECT DATA	COLLECT DATA SOUTH TO NORTH TOTAL 469 HTTS	NA A	CHIP	LINEAR	SUNNY	HOT
04/21/2004	-	BLIND TEST GRID	1510	1520	01	SETUP/DAILY START/ STOP/CALIBRATION	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	NA	NA	AN	SUNNY	HOT
04/22/2004	-	OPEN FIELD	0200	0820	110	SETUP/DAILY START/ STOP/CALIBRATION	SETUP MOBILIZATION SETTING UP TEST AREA ROPE	Ϋ́	NA NA	NA	SUNNY	WARM
04/22/2004		OPEN FIELD	0880	0350	30	COLLECT DATA	COLLECT DATA SOUTH TO NORTH	NA	CHIP	LINEAR	SUNNY	WARM
04/22/2004	_	OPEN FIELD	0650	0630	10	BREAK/LUNCH	BREAK	NA	NA	ΑN	SUNINY	WARM
04/22/2004		OPEN FIELD	0930	0941	11	SETUP/DAILY START/ STOP/CALIBRATION	SETUP MOBILIZATION SETTING UP TEST AREA ROPE	NA	NA	ΝΑ	SUNNY	WARM
04/22/2004	-	OPEN FIELD	0941	1115	94	COLLECT DATA	COLLECT DATA SOUTH TO NORTH	NA	CHIP	LINEAR	SUNNY	HOT
04/22/2004	-	OPEN FIELD	1115	1140	25	BREAK/LUNCH	BREAK	NA	AN	ΑN	SUNNY	HOT
04/22/2004	_	OPEN FIELD	1140	1200	20	COLLECT DATA	SOUTH TO NORTH	NA	CHIP	LINEAR	SUNNY	HOT
04/22/2004	-	OPEN FIELD	1200	1255	55	BREAK/LUNCH	LUNCH	NA	AN	ΝΑ	SUNNY	HOT
04/22/2004		OPEN FIELD	1255	1305	10	SETUP/DAILY START/ STOP/CALIBRATION	SETUP MOBILIZATION SETTING UP TEST AREA ROPE	NA	NA	ΨN	SUNNY	НОТ
04/22/2004	-	OPEN FIELD	1305	1355	50	COLLECT DATA	COLLECT DATA SOUTH TO NORTH	NA	CHIIP	LINEAR	SUNNY	HOT WINDY

Note: Activities pertinent to this specific demonstration are indicated in highlighted text.

		OIIS	HOT WINDY	: !	HOT	HOT	HOT	HOT	WINDY	WARM		WARM	WARM		WARM	WARM	ARM	WARM		WARM
		Field Conditions			 	 	+-	╀	<u>*</u>	_		 	+-		+	 	╁	十		-
	i	Field	SUNNY		SUNNY	SUNNY	SUNNY	SUNNY		SUNNY		SUNNY	SUNNY		SUNNA	SUNNX	SUNNY	SUNNY		SUNNY
	;	Pattern	Ϋ́		LINEAR	NA	LINEAR	AN		NA		LINEAR	LINEAR		NA	LINEAR	Ϋ́Z	LINEAR		LINEAR
Track	=Other	Explain	Ϋ́N		CHIP	NA	CHIP	NA		NA		CHIP	CHIL		NA	CHIP	ΝΑ	CHID		CHIIP
	Track	Method	Υ V		NA	NA	NA	NA		NA		NA	NA		NA	NA	NA	NA		NA
	Operational Status	Comments	SETUP MOBILIZATION	SETTING UP TEST AREA ROPE	COLLECT DATA SOUTH TO NORTH	BREAK	COLLECT DATA SOUTH TO NORTH	END OF DAILY	OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP MOBILIZATION	SETTING UP TEST AREA ROPE	COLLECT DATA	SETUP/MOBILIZAT	ION SETTING UP TEST AREA ROPE	BREAK	COLLECT DATA SOUTH TO NORTH	BREAK	SETUP/	MOBILIZATION SETTING UP TEST	COLLECT DATA
	Oremotional States	Operational Status	SETUP/DAILY START/ STOP/CALIBRATION		COLLECT DATA	BREAK/LUNCH	COLLECT DATA	SETUP/DAILY START/	STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION		COLLECT DATA	SETUP/DAILY START/	SIOF/CALIBRATION	BREAK/LUNCH	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/	STOP/CALIBRATION	COLLECT DATA
	Duration,	IIIIII	`		38	15	30	10		35		59	10		15	55	15			73
Status	Stop	7,400	1402		1440	1455	1525	1535		0705		0810	0820		0835	0930	0945	1005		1118
Status	Start	1355	1333		1402	1440	1455	1525		0630		0705	0810		0820	0835	0630	0945		1005
	Area Tested	ODEN ETET D	Or EN FIELD		OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD		OPEN FIELD		OPEN FIELD	OPEN FIELD		OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD		OPEN FIELD
Š	of People	-	4		_	-	-	_					-		-	-		-		-
	Date	2	1007		04/22/2004	04/22/2004	04/22/2004	04/22/2004		04/23/2004		04/23/2004	04/23/2004		04/23/2004	04/23/2004	04/23/2004	04/23/2004		04/23/2004

		,															_				,		_
	Field Conditions	WARM		WARM	WARM	WARM		WARM	WARM			WARM		WARM			WARM			WARM	WARM	P-7-11-7-1	WARM
	Field Co	SUNNA		SUNUS	SUNNY	SUNNY		SUNNY	SUNNY			SUNNY		SUNNS			SUNINA			SUNNY	SUNNY		SUNNY
	Pattern	NA		LINEAR	NA	LINEAR		NA	ΝΑ			LINEAR		NA			NA			ΝΑ	LINEAR		ΑN
Track Method	Explain	NA		CHIIP	NA	CHIP		NA	NA			ΨN		٧V			NA			NA	CHIP		ΝA
Track	Method	NA		NA	NA	NA		NA	NA			SdD		VΝ			ΝA			NA	NA		ΝA
Onerational Status	Operational Status Comments	SETUP/ MOBILIZATION	SETTING UP TEST AREA ROPE	COLLECT DATA SOUTH TO NORTH	BREAK	SETUP/ MOBILIZATION	SETTING UP TEST AREA ROPE	COLLECT DATA SOUTH TO NORTH	SETUP/	MOBILIZATION SETTING UP TEST	AREA ROPE	COLLECT DATA SOUTH TO NORTH	B2 258 CHIPS	END OF DAILY	OPERATIONS/ EOUIPMENT	BREAKDOWN	SETUP/	MOBILIZATION SETTING IN TEST	AREA ROPE	BREAK	COLLECT DATA	SOUTH TO NORTH GRID C2	BREAK
	Operational Status	SETUP/DAILY START/ STOP/CALIBRATION		COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION		COLLECT DATA	SETUP/DAILY START/	STOP/CALIBRATION		COLLECT DATA		SETUP/DAILY START/	STOP/CALIBRATION		SETUP/DAILY START/	STOP/CALIBRATION		BREAK/LUNCH	COLLECT DATA		BREAK/LUNCH
Duration	min	17		10	09	81		77	12			31		12			115			10	69		24
Status	Time	1135		1145	1245	1303		1420	1432			1503		1515			0805			0815	0924		0948
Status	Time	1118		1135	1145	1245		1303	1420			1432		1503			0610			0805	0815		0924
	Area Tested	OPEN FIELD		OPEN FIELD	OPEN FIELD	OPEN FIELD		OPEN FIELD	OPEN FIELD			OPEN FIELD		OPEN FIELD			OPEN FIELD			OPEN FIELD	OPEN FIELD		OPEN FIELD
No.	People	-		-	1	-		1	I			-		-			_			1	I		-
	Date	04/23/2004		04/23/2004	04/23/2004	04/23/2004		04/23/2004	04/23/2004			04/23/2004		04/23/2004			04/26/2004			04/26/2004	04/26/2004		04/26/2004

			.,,	,	,			,					_	_	
	nditions	WARM	HOT	HOT	HOT		нот	HOT	WARM	WARM	WARM	HOT	HOT	HOT	
į	Field Conditions	SUNNY	SUNNY	SUNNY	SUNNY		ANNOS	SUNNY	SUNNY	SUNINA	SUNNY	SUNNY	SUNNY	SUNNY	
	Pattern	NA	LINEAR	NA	NA		LINEAR	NA A	NA	LINEAR	NA	LINEAR	NA	NA	
Track Method	Explain	NA	CHIP	AN	AN		CHIP	NA A	NA	CHIP	AN	CHIP	NA	NA	
Track	Method	NA	NA	AN	AN		NA	ΥN	NA	NA	NA	NA	NA	NA	
Operational Status	Comments	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE	COLLECT DATA SOUTH TO NORTH GRID C2	LUNCH	SETUP/ MOBILIZATION SETTING UP TEST	AREA ROPE	COLLECT DATA SOUTH TO NORTH GRID C2	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID D2	COLLECT DATA SOUTH TO NORTH GRID D2	BREAK	COLLECT DATA SOUTH TO NORTH GRID D2	BREAK	SETUP/	SETTING UP TEST AREA ROPE GRID D2
	Operational Status	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION		COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/	
Duration,	mim	17	75	50	30		55	15	08	\$8	10	40	11	64	
Status Stop	Time	1005	1120	1210	1240		1325	1340	0720	0845	0855	5660	0946	5801	
Status Start	Time	0948	1005	1120	1210	0.0.	1240	1325	0090	0720	0845	0855	0935	0946	
	Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	C. ALLEY CO.	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	
No.	People	_		-			-		1	1		-	-	 -	
	Date	04/26/2004	04/26/2004	04/26/2004	04/26/2004	70007070	04/26/2004	04/26/2004	04/27/2004	04/27/2004	04/27/2004	04/27/2004	04/27/2004	04/27/2004	

	T	1		1	T	T		T		_
Rield Conditions	HOT	HOT	HOT	HOT	HOT	WARM	WARM	WARM	WARM	HOT
	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
Pattern	LINEAR	AN	ΨN	LINEAR	NA V	NA	LINEAR	NA V	LINEAR	AN AN
Track Method =Other	CHIP	AN	NA V	CHIIP	NA	ĄZ	CHIP	NA	CHIP	NA
Track Method	NA	AN	ĄN	NA	NA	Y X	NA	NA NA	NA	NA
Operational Status Comments	COLLECT DATA SOUTH TO NORTH GRID D2 TOTAL 256 HITS	LUNCH	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID E2	COLLECT DATA SOUTH TO NORTH GRID E2	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID E2	COLLECT DATA SOUTH TO NORTH GRID E2	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE CRID F2	COLLECT DATA SOUTH TO NORTH GRID E2 TOTAL 233 HITS	BREAK
Operational Status	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	SETUPIDAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH
Duration,	55	50	34	99	10	24	54	16	19	13
Status Stop Time	1130	1220	1254	1350	1400	0624	0718	0734	0835	0848
Status Start Time	1035	1130	1220	1254	1350	0090	0624	0718	0734	0835
Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
No. of People	1		-	-	1	-	-		1	-
Date	04/27/2004	04/27/2004	04/27/2004	04/27/2004	04/27/2004	04/28/2004	04/28/2004	04/28/2004	04/28/2004	04/28/2004

		,			,		<u>_</u>			,	
	Field Conditions	HOT	HOT	HOT	HOT	HOT	HOT	HOT	HOT	HOT	WARM
	Field Co	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	STINNY	SUNNY	SUNNY	SUNNY	SUNNY
	Pattern	NA	LINEAR	ΑN	NA	LINEAR	ĄŽ	NA	LINEAR	AA	NA
Track Method	=Other Explain	NA A	CHIP	NA	NA	CHIP	NA	NA	CHIP	NA	NA
r e	Method	NA A	NA	NA	NA	NA A	AN	NA	NA	NA	NA
Oncontional States	Operational status Comments	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE	COLLECT DATA SOUTH TO NORTH GRID F7	LUNCH	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID F2	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID F2 TOTAL 165 HITS	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID G2	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID G2	END OF DAILY OPERATIONS/ EQUIPMENT BRFAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID G2
	Operational Status	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	STOP/CALIBRATION
Duration	min	37	80	75	9	94	13	30	27	13	13
Status	Time	0925	1045	1200	1206	1252	1305	1335	1402	1415	0618
Status	Time	0848	0925	1045	1200	1206	1252	1305	1335	1402	0605
	Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
No.	People	-	1	1		-	-	-			
	Date	04/28/2004	04/28/2004	04/28/2004	04/28/2004	04/28/2004	04/28/2004	04/28/2004	04/28/2004	04/28/2004	04/29/2004

					_					
	Field Conditions	WARM	WARM	WARM	WARM	WARM	HOT	HOT	НОТ	HOT
	Field Co	SUNINY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
	Pattern	LINEAR	NA	LINEAR	Ϋ́Α	NA	LINEAR	ΑN	NA	LINEAR
Track Method =Other	Explain	СНІВ	NA	CHIP	ΝΑ	NA	CHIP	NA	NA	CHIP
Track	Method	V N	NA	NA	NA	NA	ΥN	NA	NA	NA
Operational Status	Comments	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID G?	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID G2	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID G2 TOTAL 155 HITS	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID G3	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID G3	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID G3	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID G3
	Operational Status	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA
Duration,	min	39	17	46	18	40	73	17	14	39
Status Stop	Time	0657	0714	0080	0818	0858	1011	1028	1042	1121
Status Start	Time	9618	0657	0714	0800	0818	0858	1011	1028	1042
	Area Tested	OPEN FIELD	ОРЕЙ ЧЕСО	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
No.	People		1	-	-	-	-	-		-
	Date	04/29/2004	04/29/2004	04/29/2004	04/29/2004	04/29/2004	04/29/2004	04/29/2004	04/29/2004	04/29/2004

	_	_			_		_			_			1	_		_	_				_			
}	FIEIG CONDITIONS		<u> </u>		HOT	 	HOT			WARM			WARM			WARM	WARM				WARM			
	Piela Co	VINING	SOMINI		SUNNY		SUNNY			SUNNY			SINNY			SUNNY	SUNNY				VINNI			
1	NA	S N	Ç.		LINEAR		NA			NA			LINEAR			ΑN	ΝA				LINEAR			
Track Method =Other	NA	VZ.			CHIP		Ϋ́			NA			CHIP			NA	NA				CHIP			
Track	NA	VZ	C .		NA		ÄN	!		NA			NA			NA	NA				NA			
Operational Status	LUNCH	SETT IP/	MOBILIZATION SETTING UP TEST	AREA ROPE GRID F3	COLLECT DATA	BI-DIRECTIONAL SOUTH TO NORTH	END OF DAILY	OPERATIONS/ EQUIPMENT	BREAKDOWN	SETUP/	SETTING UP TEST	AREA ROPE GRID F3	COLLECT DATA	BI-DIRECTIONAL	GRID F3	BREAK	SETUP/	MOBILIZATION	SELLING OP LEST	GRID E3	COLLECT DATA	BI-DIRECTIONAL	SOUTH TO NORTH	TOTAL 74 HITS
(Departional Status	BREAK/LUNCH	SETUP/DAILY START/	STOP/CALIBRATION		COLLECT DATA		SETUP/DAILY START/	STOP/CALIBRATION		SETUP/DAILY START/	SIOTICALIBRATION		COLLECT DATA			BREAK/LUNCH	SETUP/DAILY START/	STOP/CALIBRATION			COLLECT DATA			
Duration,	54	28			65		12			22	_		4	_		12	25				70			
Status Stop Time	1215	1243			1348		1400			0657			0741			0753	0818				8260			
Status Start Time	1121	1215	_		1243		1348			0605			0657			0741	0753				8180			
Area Tested	OPEN FIELD	OPEN FIELD			OPEN FIELD		OPEN FIELD			OPEN FIELD			OPEN FIELD			OPEN FIELD	OPEN FIELD				OPEN FIELD			
No. of People	-	_			<u> </u>		1		-	_			1			-	_				-			
Date	04/29/2004	04/29/2004			04/29/2004		04/29/2004		04700004	04/30/2004			04/30/2004		200	04/30/2004	04/30/2004				04/30/2004			

	WARM	WARM	WARM	WARM	WARM	WARM	WARM	WARM	WARM
,	SUNNY WARM	SUNNY	SUNNY	SUNINY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
	NA	ΝA	NA A	LINEAR	ΑN	V	LINEAR	V N	Y _N
Track Method =Other	NA	AN	VA	CHIP	NA	NA	CHIP	NA	V.
Track	NA	AN	NA	AN	NA	NA	NA	NA	Ϋ́
Operational Status	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID D3	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID D3	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID D3	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID D3 TOTAL 110 HITS	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID C3	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN
On one of one	SETUP/DAILY START/ STOP/CALIBRATION	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION
Duration,	21	19	31	72	09	25	13	45	10
Status Stop	0946	1008	1039	1151	1251	1317	1330	1415	1425
Status Start Time	0928	0946	1008	1039	1151	1251	1317	1330	1415
Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
No. of Peomle	-	1	-	-	-	_	-	1	-
Date	04/30/2004	04/30/2004	04/30/2004	04/30/2004	04/30/2004	04/30/2004	04/30/2004	04/30/2004	04/30/2004

	_			_	7			т-		_	
	nditions	WARM	WARM	WARM	WARM	HOT	HOT	HOT	HOT	HOT	HOT
	Field Conditions	SUNNX	SUNNY	VINNI	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	YNNIS	SUNNY
	Pattern	NA	LINEAR	ΑN	NA	LINEAR	AN	AN	LINEAR	ΑN	NA V
Track Method =Other	Explain	NA	CHIP	AN	AN .	СНГР	ĄN	NA	CHIP	NA	NA
Track	Method	NA V	NA	¥X	NA V	NA	N A	NA	Υ _N	AN	V
Operational Status	Comments	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID C3	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID C3 TOTAL 113 HITS	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID B3	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID B3 TOTAL 105 HITS	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID A3	LUNCH	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID A3	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID A4
	Operational Status	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	BREAK/ LUNCH	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION
Duration,	mim	18	111	16	35	75	30	09	83	14	33
Status Stop	Time	0623	0814	0830	5060	1020	1050	1150	1313	1327	1400
Status Start	Time	0605	0623	0814	0830	0905	1020	1050	1150	1313	1327
E	Area rested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
No. of	TCODIC	-		-	_	_	-	-[_		-
, e	05/02/2004	03/03/2004	05/03/2004	05/03/2004	05/03/2004	05/03/2004	05/03/2004	05/03/2004	05/03/2004	05/03/2004	05/03/2004

				1		T	Т	1	Т	T
	Field Conditions	НОТ	WARM	WARM	WARM	WARM	HOT	нот	HOT	HOT
	Field Cc	SUNNA	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
	Pattern	NA	NA A	LINEAR	N A	LINEAR	AN	LINEAR	Ϋ́	LINEAR
Track Method =Other	Explain	NA	A	CHIP	Y Y	CHIL	ĄN	CHIP	NA	CHIP
Track	Method	NA A	NA	NA	NA	NA A	NA	V V	NA	NA
Operational Status	Comments	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID A4	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID A4	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID A4	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID A4 TOTAL 153 HITS	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID B4	BREAK	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID B4 TOTAL 108 HITS
	Operational Status	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	BREAK/LUNCH	COLLECT DATA
Duration,	min	so.	40	85	∞	20	17	45	10	88
Status Stop	Time	1405	0645	0180	0818	0838	0855	0940	0560	1118
Status Start	Time	1400	9090	0645	0810	0818	0838	0855	0940	0920
	Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
S. P.	Feople	-	1	-	-	-	I		1	-
ŕ	Date	05/03/2004	05/04/2004	05/04/2004	05/04/2004	05/04/2004	05/04/2004	05/04/2004	05/04/2004	05/04/2004

		_											_				_		_							
	Field Conditions	HOT	HOT			HOT			HOT		WARM			www.wo+20-7	WARM				WARM	WARM			HOT			
	Field Co	SUNNY	SUNNX	-		SUNNY			SUNNY		SUNNY				SUNNY				SUNNY	SUNNY			SITNNY			
	Pattern	NA	NA			LINEAR			NA		NA				LINEAR				NA	NA	_		LINEAR			
Track Method	=Other Explain	NA	NA			CHIP			NA		NA				CHIP				NA	NA			CHIP			
	Track Method	NA	NA			NA			NA		NA				NA				ΑN	NA			NA			
	Operational Status Comments	LUNCH	SETUP/ MOBILIZATION	SETTING UP TEST	AREA ROPE GRID C4	COLLECT DATA BI-DIRECTIONAL	SOUTH TO NORTH	TOTAL 90 HITS	END OF DAILY OPER ATTONS	EQUIPMENT BREAKDOWN	SETUP/	MOBILIZATION	SETTING UP TEST	AREA ROPE GRID D4	COLLECT DATA	BI-DIRECTIONAL	NOUTH TO NOKIH	TOTAL 113 HITS	BREAK	SETUP/MOBILIZAT	SETTING UP TEST	AREA ROPE	COLLECT DATA	BI-DIRECTIONAL	SOUTH TO NOKTH	TOTAL 159 HITS
	Operational Status	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION			COLLECT DATA			SETUP/DAILY START/ STOP/CALIBRATION		SETUP/DAILY START/	STOP/CALIBRATION	-		COLLECT DATA				BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION			COLLECT DATA			
•	Duration, min	09	39			23			80		55				08				51	35	_		06			
Status	Stop Time	1218	1257			1410			1415		0710				0830				0845	0350			1050			
Status	Start Time	1118	1218			1257			1410		0615				0710				0830	0845			0350			
	Area Tested	OPEN FIELD	OPEN FIELD			OPEN FIELD			OPEN FIELD		OPEN FIELD				OPEN FIELD				OPEN FIELD	OPEN FIELD			OPEN FIELD			
No.	People								-		I				-					——————————————————————————————————————			1			
	Date	05/04/2004	05/04/2004			05/04/2004			05/04/2004		05/05/2004				05/05/2004				05/05/2004	05/05/2004			05/05/2004			

_		_			_			_		_										T			
	Field Conditions	HOT	HOT		HOT	HOT			HOT		WARM		-	WARM			WARM	_		WARM			
	Field Co	ANNOS	KNNOS		SUNNY	SUNNX			ANNOS		ANNOS			SUNNY			SUNNY			SUNINA			
	Pattern	NA	ΥN		NA	LINEAR			VΝ		NA			LINEAR			NA			LINEAR			
Track Method =Other	Explain	VΝ	VΝ		NA	CHIP			NA		ΨN			CHILP			NA			CHIP			
Track	Method	NA	ΥN		ΑN	ΝΑ			NA		NA			VΝ			NA			ΥN			
Operational Status	Comments	BREAK	SETUP/ MOBILIZATION SETTING IN TEST	AREA ROPE GRID F4	LUNCH	COLLECT DATA BI-DIRECTIONAL	GRID F4	TOTAL 101 HITS	END OF DAILY OPERATIONS/ EQUIPMENT	BREAKDOWN	SETUP/ MOBILIZATION	SETTING UP TEST AREA ROPE	GRID G4	COLLECT DATA BI-DIRECTIONAL	SOUTH TO NORTH	TOTAL 53 HITS	SETUP/ MOBILIZATION	SETTING UP TEST	GRID F5	COLLECT DATA	BI-DIRECTIONAL SOUTH TO NORTH	GRID F5	TOTAL 27 HITS
	Operational Status	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION		BREAK/LUNCH	COLLECT DATA			SETUP/DAILY START/ STOP/CALIBRATION		SETUP/DAILY START/			COLLECT DATA			SETUP/DAILY START/ STOP/CALIBRATION			COLLECT DATA			
Duration,	min	25	35		50	70			10		45			32			43			15			
Status Stop	Time	1115	1150		1240	1350			1400		0655			7270			0810			0825			
Status Start	Time	1050	1115		1150	1240			1350		0610			0655			0727			0810			
	Area Tested	OPEN FIELD	OPEN FIELD		OPEN FIELD	OPEN FIELD			OPEN FIELD		OPEN FIELD			OPEN FIELD			OPEN FIELD			OPEN FIELD			
No. of	People	_	-		1	_			-		-									1			
	Date	05/05/2004	05/05/2004		05/05/2004	05/05/2004			05/05/2004		05/06/2004			05/06/2004			05/06/2004			5/06/2004			

										_	T
	Field Conditions	НОТ	HOT	HOT	HOT	HOT	HOT	WARM	WARM	WARM	HOT
	Field Co	SUNNY	SUNNY	SUNNY	KNNDS	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
	Pattern	LINEAR	NA	NA	NA	NA	NA	NA	LINEAR	NA	LINEAR
Track Method =Other	Explain	CHIP	NA	NA	AN	NA	AN	NA	CHIL	NA	CHID
Track	Method	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA A
Operational Status	Comments	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID H7 TOTAL 17 HITS	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID JI 1/22	LUNCH	SETUP/ MOBILIZATION SETTING UP TEST AREA MOGUL.	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRIDS 11/12, AND13	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID JI AND J2	BREAK	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRIDS 11/12, AND 13 TOTAL 181 HITS
	Operational Status	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START) STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	COLLECT DATA
Duration,	min	2	33	85	50	08	ĸ	28	84	∞	59
Status Stop	Time	0957	1030	1155	1245	1405	1410	0613	0737	0745	0844
Status Start	Time	0820	0957	1030	1155	1245	1405	0545	0613	0737	0745
	Area Tested	YUMA EXTREME	YUMA EXTREME	MOGUL	MOGUL	MOGUL	MOGUL	MOGUL	MOGUL	MOGUL	MOGUL
No.	People	-		-	1		-	jund	 '		y1
I	Date	05/11/2004	05/11/2004	05/11/2004	05/11/2004	05/11/2004	05/11/2004	05/12/2004	05/12/2004	05/12/2004	05/12/2004

Note: Activities pertinent to this specific demonstration are indicated in highlighted text.

n Field Condi	N N	Field Condi SUNNY SUNNY SUNNY SUNNY	SUNNY SUNNY SUNNY SUNNY SUNNY SUNNY SUNNY	SUNNY SUNNY SUNNY SUNNY SUNNY SUNNY SUNNY SUNNY	Field Con- SUNNY SUNNY SUNNY SUNNY SUNNY SUNNY SUNNY
NA	AN AN	NA NA NA LINEAR	NA NA LINEAR NA	NA N	NA LINEAR LINEAR
		NA CHIP	NA CHIP	NA CHIP	NA NA CHIP
NA	REST REDS B NA	NA A	A A A A	A A A A	A A A A A A A A A A A A A A A A A A A
MOBILIZATION SETTING UP TEST	II/I2, ANDI3 LUNCH	II/I2, ANDI3 II/I2, ANDI3 LUNCH COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRIDS II/12 ANDI3 TOTAL 164 HITS	INIZ, ANDIS INIZ, ANDIS LUNCH COLLECT DATA SI-DIRECTIONAL OUTH TO NORTH RIDS INIZ 164 HITS END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	III.2, ANDI3 II.12, ANDI3 LUNCH COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRIDS II/12 ANDI3 TOTAL 164 HITS END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN SETUP/ MOBILIZATION SETUP/ SETUP/ MOBILIZATION SET	LUNCH COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRIDS 11/12 AND13 TOTAL 164 HITS END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN SETUP/ MOBILIZATION SETUR/ MOBILIZATION SETUR/ ANDH3 COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID H1/H2 ANDH3 TOTAL 143 HITS
z	BREAK/LUNCH		XT/ N		
65 BREAK/L		124 COLLECT			
1100	1304		1320	1320	0623
+	MOGUL 1100				
1 MOC		NA NA NA NA NA NA NA NA NA NA NA NA NA N	M MOC		
05/12/2004	05/12/2004		05/12/2004	05/12/2004	05/12/2004

Note: Activities pertinent to this specific demonstration are indicated in highlighted text.

	nditions		COOL	WARM		WARM	WARM	WARM	WARM		WARM	WARM	WARM	WARM	WARM	HOT	HOT	HOT
	Field Conditions		SUNNY	SUNNY		SUNNY	SUNNY	SUNNY	SUNNY		SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
	Pattern		ΑN	LINEAR		A	NA	NA	LINEAR		N	NA	LINEAR	NA	LINEAR	NA	LINEAR	NA
Track Method	=Other Explain		NA	FLAG		Y Y	Ϋ́Ν	AN	FLAG		V	NA	FL.AG	NA	FLAG	NA	FLAG	NA
!	Track Method		NA	NA		Ä	NA	AN	NA		NA	NA	NA	NA	NA	NA	NA	NA
	Operational Status Comments		SETUP/ MOBILIZATION	COLLECT DATA BIDIRECTIONAL	EAST TO WEST	LUNCH	COLLECT DATA BIDIRECTIONAL NORTH TO SOLITH	BREAK	COLLECT DATA BIDIRECTIONAL	NORTH TO SOUTH	END OF DAILY OPERATIONS/ EQUIPMENT	SETUP/ MORII IZATION	COLLECT DATA SOUTH TO NORTH	BREAK	COLLECT DATA	BREAK	COLLECT DATA	LUNCH
	Operational Status	TEAM 1 (163666)	INTIAL SETUP	COLLECT DATA	The state of the s	BKEAK/LUNCH	COLLECT DATA	BREAK/LUNCH	COLLECT DATA		SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/	COLLECT DATA	BREAK/LUNCH	COLLECT DATA	BREAK/LUNCH	COLLECT DATA	BREAK/LUNCH
į	Duration, min		08	70	5	00	09	10	55		01	25	65	10	80	20	100	38
Status	Stop Time		1110	1220	1330	1320	1420	1430	1525	1	1535	0220	0835	0845	1005	1025	1205	1243
Status	Time		0920	1110	0001	1220	1320	1420	1430	1	1525	0705	0730	0835	0845	1005	1025	1205
	Area Tested		CALIBRATION LANES	CALIBRATION LANES	CATIBDATION	LANES	CALIBRATION LANES	CALIBRATION LANES	CALIBRATION LANES	TAN AMERICA	CALIBRATION	CALIBRATION LANES	CALIBRATION LANES	CALIBRATION LANES	CALIBRATION LANES	CALIBRATION LANES	CALIBRATION LANES	CALIBRATION LANES
Š.	People		7	7	,	4	2	2	2	,	٧	2	2	2	2	2	2	2
	Date	100001	04/19/2004	04/19/2004	04/19/2004		04/19/2004	04/19/2004	04/19/2004	74/10/2004	D-16	1	04/20/2004	04/20/2004	04/20/2004	04/20/2004	04/20/2004	04/20/2004

Note: Activities pertinent to this specific demonstration are indicated in highlighted text.

1343
1343 1405 22
1405 1447 42
1520 1525 5 SETUP/DAILY START/ STOP/CALIBRATION
0645 0705 20 SETUP/DAILY START) STOP/CALIBRATION
0705 0858 113
0920 1100 100
1100 1120 20
1120 1210 50
1210 1305 55
1305 1510 125

Note: Activities pertinent to this specific demonstration are indicated in highlighted text.

	;								Track			
,	င္တို့ မွာ		Start	Status Stop	Duration,		Operational Status	Track	Method =Other			
Date	People	Area Tested	Time	Time	min	Operational Status	Comments	Method	Explain	Pattern	Field Conditions	nditions
04/21/2004	-	BLIND TEST GRID	1510	1520	01	SETUP/DAILY START/ STOP/CALIBRATION	END OF DAILY OPERATIONS/	ΑΝ	AN	ΝΑ	SUNNY	HOT
							EQUIPMENT BREAKDOWN					
04/22/2004	_	OPEN FIELD	0020	0820	110	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/ MOBILIZATION	NA	NA	NA	SUNNY	WARM
							SETTING UP TEST AREA ROPE					
04/22/2004		OPEN FIELD	0820	0920	30	COLLECT DATA	COLLECT DATA SOUTH TO NORTH	ΝΑ	CHIP	LINEAR	SUNNY	WARM
04/22/2004	_	OPEN FIELD	0920	0630	10	BREAK/LUNCH	BREAK	NA AN	NA NA	ΨZ	SINNY	WARM
04/22/2004		OPEN FIELD	0630	0941	11	SETUP/DAILY START/	SETUP/	NA	NA	Y.	SUNNY	WARM
						STOP/CALIBRATION	MOBILIZATION SETTING UP TEST					
70000000	,						AREA ROPE		_			
04/22/2004	7	OPEN FIELD	0941	1115	4	COLLECT DATA	COLLECT DATA	ΑΝ	CHIL	LINEAR	SUNNY	HOT
04/22/2004	-	OPEN FIELD	1115	1140	25	BREAK/LUNCH	BREAK	NA NA	NA	ΑΝ	YNNIS	HOT
04/22/2004		OPEN FIELD	1140	1200	20	COLLECT DATA	COLLECT DATA	NA	CHIP	LINEAR	SUNNY	HOT
04/22/2004	-	OPEN FIELD	1200	1255	55	BREAK/LINCH	HINCH IINCH	Ý.	VIV	V.V.	CITATAL	FOIL
04/22/2004	_	OPEN FIELD	1255	1305	0	SETTIP/DAILY START/	CETT ID/	VI	VI	YN .	SUNNI	IOH HOII
						STOP/CALIBRATION	MOBILIZATION	Ç.	Ų.	Y Y	SONNY	<u></u>
							SETTING UP TEST AREA ROPE					
04/22/2004	1	OPEN FIELD	1305	1355	50	COLLECT DATA	COLLECT DATA	ΑN	CHILD	LINEAR	SUNNY	HOT
04/22/2004	-	OPEN FIELD	1355	1402	7	SETUP/DAILY START/	SETUP/	NA	NA	AN	SUNNY	HOT
						STOP/CALIBRATION	MOBILIZATION SETTING UP TEST					WINDY
7000000							AREA ROPE					
04/22/2004	-	OPEN FIELD	1402	1440	38	COLLECT DATA	COLLECT DATA	NA	CHIIP	LINEAR	SUNNY	HOT
							SOUTH TO NORTH					WINDY

Γ		us	HOT	HOT	HOT	WARM	WARM	WARM	WARM	WARM	WARM	WARM	WARM	WARM	RM
		Field Conditions	HOT	H	M WIN	WA	WA	WA	WA	M _A	WA	WA	WA	WA	WARM
		Field C	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNINY	SUNNY	SUNNY	SUNNY	SUNNY
		Pattern	NA	LINEAR	NA	NA A	LINEAR	LINEAR	AN	LINEAR	NA	LINEAR	LINEAR	A N	LINEAR
Track	Method =Other	Explain	NA	CHIP	ΝΑ	NA	CHIP	CHIP	ΝΑ	CHIP	AN	CHIIP	CHIP	NA	CHIP
	Track	Method	VΑ	ΑN	AN A	Ϋ́	NA	NA	NA	NA	NA	V	NA	NA	NA
	Operational Status	Comments	BREAK	COLLECT DATA SOUTH TO NORTH	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE	COLLECT DATA SOUTH TO NORTH	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE	BREAK	COLLECT DATA SOUTH TO NORTH	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE	COLLECT DATA SOUTH TO NORTH	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE	COLLECT DATA SOUTH TO NORTH
		Operational Status	BREAK/LUNCH	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	BREAK/LUNCH	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA
	Duration,	min	15	30	10	35	65	10	15	55	15	20	29	23	10
,	Stop	Time	1455	1525	1535	0705	0810	0820	0835	0630	0945	1005	1112	1135	1145
,	Start	Time	1440	1455	1525	0630	0705	0810	0820	0835	0930	0945	1005	1112	1135
		Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
, in	of .	People	-	_			-	-	-	-	-		1		1
	í	Date	04/22/2004	04/22/2004	04/22/2004	04/23/2004	04/23/2004	04/23/2004	04/23/2004	04/23/2004	04/23/2004	04/23/2004	04/23/2004	04/23/2004	04/23/2004

		_					,	-		_			_						_								_
	Field Conditions	WARM	WARM		WARM		WARM			WARM			WARM			WARM			WARM	WARM			WARM	WARM			
	Field Co	SUNNY	SONA		SUNNY		SUNNY			SUNNY			ANNOS	_		SUNNY			SUNNY	SUNNY			SUNNA	SUNNY			
	Pattern	NA	LINEAK		NA		NA			LINEAR			AN			NA V			NA	LINEAR			NA	NA			
Track Method =Other	Explain	AA	E C		NA		NA			NA VA			NA			Y V			NA	CHIP			AN	AN			
Track	Method	NA V	Y Y		NA		ΝA			GPS			Ϋ́Z			Ϋ́			NA	NA			ΑN	ΑN			
Operational Status	Comments	DNEAN CETT ID	MOBILIZATION	SETTING UP TEST AREA ROPE	COLLECT DATA	SOUTH TO NORTH	SETUP/	MOBILIZATION	SELLING OF TEST AREA ROPE	COLLECT DATA	SOUTH TO NORTH	B2_238 CHIPS	END OF DAILY	OPERATIONS/ EQUIPMENT	BKEAKDOWN	SETUP/ MOBILIZATION	SETTING UP TEST	AREA ROPE	BREAK	COLLECT DATA	SOUTH TO NORTH	GRID C2	BREAK	SETUP/	MOBILIZATION	SETTING UP TEST	AREA ROPE
,	Sperational Status	SETT ID/DAIL V STABT/	STOP/CALIBRATION		COLLECT DATA		SETUP/DAILY START/	STOP/CALIBRATION		COLLECT DATA			SETUP/DAILY START/	STOP/CALIBRATION		SETUP/DAILY START/ STOP/CALIBRATION			BREAK/LUNCH	COLLECT DATA			BREAK/LUNCH	SETUP/DAILY START/	STOP/CALIBRATION		
Duration,	1 5	8	2		77		13			29			4		115	CII			2	69		1	24	17			
Status Stop	1245	1303	}		1420		1432			1501		3131	cici		3000	CD&D		2.00	CI 80	0924		9,00	548	1005			
Status Start Time	1145	1245	<u> </u>		1303	30,	1420			1432		1501	1001		0410	9190		2000	coso	0815		, ,	0924	0948			
Ares Tectod	OPEN FIELD	OPEN FIELD			OPEN FIELD	Charles of the Control of the Contro	OPEN FIELD			OPEN FIELD		ODEN ETE! D	טרפוז רופרט		OPEN FIET D	O EN TIME		Onen rate o	OPEN FIELD	OPEN FIELD		O TOTAL INDIAN	OFEN FIELD	OPEN FIELD			
No. of People	1	_			-	-	-					-	-		-	•		Ţ.		→		-					
Date	04/23/2004	04/23/2004			04/23/2004	04/03/0004	04/23/2004			04/23/2004		04/23/2004	1007/07/10		04/26/2004	20		100004	04/26/2004	t007/07/t0		MOCACOM	04/20/2004	04/26/2004			

	_	_					,				
Reld Conditions	HOT	HOT	HOT	HOT	HOT	WARM	WARM	WARM	HOT	HOT	HOT
Eibld Co	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
Pattern	LINEAR	AN	NA	LINEAR	AN	N A	LINEAR	NA	LINEAR	ΑΝ	Ϋ́
Track Method =Other Explain	CHIP	NA	ΝΑ	CHIP	ΝΑ	NA NA	CHIIP	ΨZ	CHIP	ΝΑ	V
Track Method	NA	NA	V.	NA	V A	AN A	NA	ΝΑ	NA	ΑN	NA
Operational Status Comments	COLLECT DATA SOUTH TO NORTH GRID C?	LUNCH	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE	COLLECT DATA SOUTH TO NORTH GRID C2	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID D2	COLLECT DATA SOUTH TO NORTH GRID D2	BREAK	COLLECT DATA SOUTH TO NORTH GRID D2	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID D2
Operational Status	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION
Duration, min	75	50	30	55	15	08	85	10	04	11	49
Status Stop Time	1120	1210	1240	1325	1340	0720	0845	0855	0935	0946	1035
Status Start Time	1005	1120	1210	1240	1325	0090	0720	0845	0855	0935	0946
Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
No. of People	-	1	_	-	-	-	-	-	-	-	-
Date	04/26/2004	04/26/2004	04/26/2004	04/26/2004	04/26/2004	04/27/2004	04/27/2004	04/27/2004	04/2//2004	04/27/2004	04/27/2004

		_			_				1
	UNNY HOT	HOT	HOT	HOT	HOH	HOT	WARM	WARM	WARM
ļ	SUNNY	ANNITS	SUNNY	SUNNY	CLINNY	SUNNY	SUNNY	SUNNY	SUNNY
Ė	LINEAR	AN	NA	LINEAR	AN	NA	NA	LINEAR	NA
Track Method =Other	CHIP	NA	NA	CHIP	NA	NA	NA	CHIP	NA
Track	NA	ΑN	NA NA	NA	Ϋ́Z	NA	NA	NA	ΑΝ
Operational Status	COLLECT DATA SOUTH TO NORTH	LUNCH	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE	COLLECT DATA SOUTH TO NORTH GRID E2	BREAK	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID E2	COLLECT DATA SOUTH TO NORTH GRID E2	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID E2
Onerational Status	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION
Duration,	55	50	34	39	17	10	24	54	16
Status Stop Time	1130	1220	1254	1333	1350	1400	0624	0718	0734
Status Start Time	1035	1130	1220	1254	1333	1350	0090	0624	0718
Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
No. of People			-	1	-	_	-	1	_
Date	04/27/2004	04/27/2004	04/27/2004	04/27/2004	04/27/2004	04/27/2004	04/28/2004	04/28/2004	04/28/2004

				_		_		_			_				_				_	,						
	The state of the s	WARM	1	HOI	HOT			HOT			HOT	HOT				HOT			HOT	HOT				HOT		
	C Float	SUNNX		SONNX	SUNNY			SUNNY			SUNNY	SUNNY				SUNNY			SUNNY	SUNNY				SUNNY		
	Dottom	LINEAR		NA	NA			LINEAR			ΑN	ΝΑ				LINEAR			ΑN	NA				LINEAR		
Track Method	=Other	CHIP		NA	V			CHIP			NA	NA				CHIP			AN	ΑN				CHIP		
	Track	NA	7.1.5	NA	Υ Y			NA			NA	NA				NA A			NA	NA				NA		
	Operational Status	COLLECT DATA SOUTH TO NORTH GRID E2	TOTAL 233 HITS	BREAK	SETUP/MOBILIZAT ION	SETTING UP TEST AREA	ROPE GRID F2	COLLECT DATA	BI-DIRECTIONAL SOUTH TO NORTH	GRID F2	LUNCH	SETUP/MOBILIZAT ION	SETTING UP TEST	AREA	KOPE GRID F2	COLLECT DATA BI-DIRECTIONAL	SOUTH TO NORTH	TOTAL 165 HITS	BREAK	SETUP/	MOBILIZATION SETTING ID TEST	AREA ROPE	GRID G2	COLLECT DATA	SOUTH TO NORTH	GRID G2
	Onerational Status	COLLECT DATA	DDEAW TOOLE	DACANLUNCA	SETUP/DAILY START/ STOP/CALIBRATION			COLLECT DATA			BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION				COLLECT DATA			BREAK/LUNCH	SETUP/DAIL Y START/	STOP/CALIBRATION			COLLECT DATA		
	Duration, min	61	1.2	LJ	37			08			7.5	9				46			13	30				27		
Status	Stop Time	0835	0040	00-00	0925			1045			1200	1206				1252		-	1305	1335				1402		
Status	Start	0734	0025	CCOO	0848			0925			1045	1200			,	1206			1252	1305				1335		
	Area Tested	OPEN FIELD	OPEN FIELD	COLUMN TO THE	OPEN FIELD			OPEN FIELD			OPEN FIELD	OPEN FIELD				OPEN FIELD			OPEN FIELD	OPEN FIELD				OPEN FIELD		
No.	of People	-	-		-			-			-	-							-	_						
	Date	04/28/2004	04/28/2004	7000000	04/28/2004			04/28/2004			04/28/2004	04/28/2004			7000000	04/28/2004			04/28/2004	04/28/2004				04/28/2004		

		T		I.			Т			Ī				<u>.</u>			_						Т			Т
	Field Conditions	HOT		WARM			WARM			WARM				WARM				WARM	WARM				HOT			HOT
	Field Co	SUNNY		SUNNY			SUNNY			SUNNY				SUNNY				SUNNY	SUNNY				SUNINY			SUNNY
	Pattern	AN	.	AN			LINEAR			AN				LINEAR				NA	AN				LINEAR			AN
Track Method =Other	Explain	Ϋ́		NA			CHIP			ΑΝ				CHIP				NA	NA				EE			NA
Track	Method	Ϋ́		ΑN			ΑN			Ϋ́				Y Y				AN	AN	·			AN			NA
Operational Status	Comments	END OF DAILY OPERATIONS/	EQUIPMENT BREAKDOWN	SETUP/	SETTING UP TEST	AREA ROPE GRID G2	COLLECT DATA	BI-DIRECTIONAL SOUTH TO NORTH	GRID G2	SETUP/	MOBILIZATION SETTING 11D TEST	AREA ROPE	GRID G2	COLLECT DATA	SOUTH TO NORTH	GRID G2	TOTAL 155 HITS	BREAK	SETUP/	MOBILIZATION SETTING IP TEST	AREA ROPE	GRID G3	COLLECT DATA	BI-DIRECTIONAL	GRID G3	BREAK
	Operational Status	SETUP/DAILY START/ STOP/CALIBRATION		SETUP/DAILY START/	NOTICE TO LOCATION OF THE PROPERTY OF THE PROP		COLLECT DATA			SETUP/DAILY START/	STOP/CALIBRATION			COLLECT DATA				BREAK/LUNCH	SETUP/DAILY START/	STOP/CALIBRATION			COLLECT DATA			BREAK/LUNCH
Duration,	min	13		13			39			17				46				10	40				73			17
Status Stop	Time	1415		8190			0657			0714			0000	90 80 80			0000	0010	8280				1011			1028
Status Start	Time	1402		9605			0618			0657		-		0/14			0000	000	0818				0858			1011
	Area Tested	OPEN FIELD		OPEN FIELD			OPEN FIELD			OPEN FIELD			ODDEN THE P	OFEN FIELD			ODEN CIET D	Open Frei	OFEN FIELD				OPEN FIELD			OPEN FIELD
No.	People	-		_			_						-	-			-	-	-							
,	Date	04/28/2004		04/29/2004			04/29/2004		, 000,00,70	04/29/2004			7000000	1007167110			04/29/2004	74797707	±007/27/±0				04/29/2004			04/29/2004

		T		_	T				1	_
	Field Conditions	HOT	HOT	HOT	HOT	HOT	HOT	WARM	WARM	WARM
	Field Co	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
	Pattern	NA AN	LINEAR	AN	NA	LINEAR	NA	NA	LINEAR	NA
Track Method	=Other Explain	NA AN	CHIP	NA	NA	CHIP	NA	NA	CHIP	NA
	Track Method	NA	NA NA	NA	NA V	NA	NA	NA	Ϋ́	NA
	Operational Status Comments	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID G3	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID G3 TOTAL 206 HIT	LUNCH	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID F3	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID F3	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/MOBILIZAT ION SETTING UP TEST AREA ROPE GRID F3	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID F3	BREAK
	Operational Status	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH
	Duration, min	14	39	54	28	92	12	52	4	12
Status	Stop Time	1042	1121	1215	1243	1348	1400	290	0741	0753
Status	Start	1028	1042	1121	1215	1243	1348	0605	0657	0741
	Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
Zo.	of People	1	1	-	-	1	1	-	-	-
	Date	04/29/2004	04/29/2004	04/29/2004	04/29/2004	04/29/2004	04/29/2004	04/30/2004	04/30/2004	04/30/2004

				_	T		_	
nditions	WARM	WARM	WARM	WARM	WARM	WARM	WARM	WARM
Field Conditions	SUNNA	SUNNY	SUNNY	SUNNY	SUNINY	SUNNY	SUNNY	SUNNY
Pattern	NA	LINEAR	Ϋ́	NA	NA	LINEAR	NA	VA V
Track Method =Other Explain	NA	CHIP	Ϋ́Α	NA	NA	CHIP	NA	NA
Track Method	NA	NA	AN	NA	NA	NA	YA V	NA A
Operational Status Comments	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID E3	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID E3 TOTAL 74 HITS	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID D3	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID D3	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID D3	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID D3
Operational Status	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION
Duration, min	25	70	21	19	31	72	09	25
Status Stop Time	0818	0928	0949	1008	1039	1151	1251	1317
Status Start Time	0753	0818	0928	0946	1008	1039	1151	1251
Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
No. of People		_	_	-	-		-	_
Date	04/30/2004	04/30/2004	04/30/2004	04/30/2004	D-26	04/30/2004	04/30/2004	04/30/2004

	itions	WARM	WARM	WARM	WARM	WARM	WARM	WARM	HOT
	Field Conditions	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
	Pattern	LINEAR	NA	NA	NA A	LINEAR	NA	N A	LINEAR
Track Method	=Orner Explain	CHIP	NA NA	NA	NA	CHIP	AN	NA V	CHIP
1000	Method	AN A	NA	NA	NA	NA	ΨN	A A	NA
Omoundianal Chatra	Operational Status Comments	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID D3 TOTAL 110 HITS	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID C3	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID C3	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID C3 TOTAL 113 HITS	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID B3	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID B3 TOTAL 105 HITS
	Operational Status	COLLECT DATA	STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA
Threefion	min	13	45	10	18	111	16	35	75
Status	Time	1330	1415	1425	0623	0814	0830	5060	1020
Status	Time	1317	1330	1415	9090	0623	0814	0830	0905
	Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
No.	People		-				-	-	
	Date	04/30/2004	04/30/2004	04/30/2004	05/03/2004	05/03/2004	05/03/2004	05/03/2004	05/03/2004

		T	_		_	T		 		
	nditions	HOT	HOT	HOT	HOT	HOT	HOT	WARM	WARM	WARM
	Field Conditions	SUNNY	SUNNY	SUNNY	SUNNX	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
	Pattern	N A	AN	LINEAR	NA	NA	NA	NA	LINEAR	NA N
Track Method	Explain	NA	AN	CHIP	NA	NA	NA	NA	CHIP	NA A
Track	Method	NA	NA	ΨN	NA	NA	NA	NA	A'A	NA A
Operational Status	Comments	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID	LUNCH	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID A3 TOTAL 105 HITS	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID A4	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID A4	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID A4	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID A4
	Operational Status	SETUP/DAILY START/ STOP/CALIBRATION	BREAK/ LUNCH	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION
Duration,	min	30	09	83	14	33	5	40	58	8
Status Stop	Time	1050	1150	1313	1327	1400	1405	0645	0810	0818
Status Start	Time	1020	1050	1150	1313	1327	1400	0605	0645	0810
	Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
No. of	People		-	1	-	1	_	-		П
	Date	05/03/2004	05/03/2004	05/03/2004	05/03/2004	05/03/2004	05/03/2004	05/04/2004	05/04/2004	05/04/2004

		2			Ī.			_			2
	Field Conditions	WARM	HOT	HOT	HOT	HOT	HOT	HOT	HOT	HOT	WARM
	Field Co	SUNINY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
	Pattern	LINEAR	NA	LINEAR	NA	LINEAR	Α̈́Ν	NA	LINEAR	V	NA
Track Method =Other	Explain	CHIP	NA	CHIP	NA	CHIP	ΑN	NA	CHIP	ΥN	NA
Track	Method	NA	NA	NA	NA	NA	NA	NA	VA.	NA	NA
Onerational Status	Comments	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID A4 TOTAL 153 HITS	BREAK	SETUP/MOBILIZATION SETTING UP TEST AREA ROPE GRID B4	BREAK	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID B4 TOTAL 108 HITS	LUNCH	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID C4	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID C4 TOTAL 90 HITS	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID D4
	Operational Status	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	BREAK/LUNCH	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION
Duration.	min	20	17	45	10	88	09	39	73	\$	55
Status	Time	0838	0855	0940	0950	1118	1218	1257	1410	1415	0710
Status	Time	0818	0838	0855	0940	0950	1118	1218	1257	1410	0615
	Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
No.	People		I		1	1	1	_	-	1	
	Date	05/04/2004	05/04/2004	05/04/2004	05/04/2004	05/04/2004	05/04/2004	05/04/2004	05/04/2004	05/04/2004	05/05/2004

		T-	Ţ	٧	1	T		Т		T	W.
	Field Conditions	WARM	WARM	WARM	HOT	HOT	HOT	HOT	HOT	HOT	WARM
		SUNNY	SUNNY	SUNNY	SUNNY	YNNITS	SUNNY	STINNY	SUNNY	SUNNY	SUNNY
	Pottern	LINEAR	NA	NA	LINEAR	AN	AN	NA	LINEAR	NA	NA
Track Method	=Other	CHIP	NA	NA	CHIP	ΑN	NA V	AN	CHIP	NA	NA
	Track	NA	NA	NA	NA	ΑΝ	NA	NA	NA	NA	NA
	Operational Status Comments	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID D4 TOTAL 113 HITS	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID D4 TOTAI 150 HTS	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID F4	LUNCH	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID F4 TOTAL 101 HITS	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID G4
	Operational Status	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	BREAK/LUNCH	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION
	Duration, min	08	15	35	06	25	35	50	70	10	45
Status	Stop Time	0830	0845	0920	1050	1115	1150	1240	1350	1400	0655
Status	Start Time	0710	0830	0845	0920	1050	1115	1150	1240	1350	0610
	Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
No.	of People	·	-	-	1	1	_	-		-	
	Date	05/05/2004	05/05/2004	05/05/2004	05/05/2004	05/05/2004	05/05/2004	05/05/2004	05/05/2004	05/05/2004	05/06/2004

		WARM	WARM	WARM	WARM	WARM	нот	HOT	НОТ	нот
:	į	SUNNY WARN	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
	;	LINEAR	NA	LINEAR	NA	NA	LINEAR	NA	NA	LINEAR
Track	=Other	CHIP	NA	CHIP	NA	NA	CHIP	NA	NA	CHIP
	Track	NA	ΨN	NA	ΑN	NA	NA	NA	NA	N A
	Operational Status	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID G4 TOTAL 53 HTS	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID F5	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID F5 TOTAL 27 HITS	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID ES	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID E5 TOTAL 81 HITS	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID D5	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID D5
		COLLECT DATA	STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA
	Duration,	32	43	15	12	53	55	10	30	26
Status	Stop	0727	0810	0825	0837	0630	1025	1035	1105	1201
Status	Start	0655	0727	0810	0825	0837	0630	1025	1035	1105
	Area Tectod	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD
No.	of People	-		-	-					1
	Date	05/06/2004	05/06/2004	05/06/2004	05/06/2004	05/06/2004	05/06/2004	05/06/2004	05/06/2004	05/06/2004

		TOT	HOT		HOT				HOT			WARM				WARM	1			710.77	WARW	-			TOT		
		STININY HOT	 		SUNNY				SUNNY			SUNNY	-			NAMIN V				CT TATAL	╀				CITATIVI		····
	1	rattern NA	LINEAR		NA			•	AN			Ą				LINEAR	1			414	AN				INEAD	NEGRIC	
Track	=Other	Explain NA	CHP		NA				AN		-	AN			-	CHIP				MA	AN	!			CHIP		
	Track	NA	AN		AN				NA			ΑN				AN	:			NA	4 X				ΔN		
	Operational Status	LUNCH	COLLECT DATA	BI-DIRECTIONAL SOUTH TO NORTH GRID D5	SETUP/	MOBILIZATION	SETTING UP TEST	AREA ROFE GRID CS	END OF DAILY	OPERATIONS/	EQUIPMENT BREAKDOWN	SETUP/	MOBILIZATION	SETTING UP TEST	AREA ROPE	COLLECT DATA	RI-DIRECTIONAL	SOUTH TO NORTH	GRID C5	IOIAL 134 HIIS	SETUP/	MOBILIZATION	SETTING UP TEST	AREA ROPE	COLLECT DATA	BI-DIRECTIONAL	SOUTH TO NORTH
	Onerational Status	BREAK/LUNCH	COLLECT DATA		SETUP/DAILY START/	STOP/CALIBRATION			SETUP/DAILY START/	STOP/CALIBRATION		SETUP/DAILY START/	STOP/CALIBRATION			COLLECT DATA				BREAKILINCH	SETUP/DAILY START/	STOP/CALIBRATION			COLLECT DATA		
	Duration,	52	30		29				9			20				8				12	23				70		
Status	Stop	1255	1325		1354				1400			0630				0080				0812	0835				0945		
Status	Start	1201	1255		1325				1354			0610				0630				0080	0812				0835		
	Area Tested	OPEN FIELD	OPEN FIELD		OPEN FIELD				OPEN FIELD			OPEN FIELD				OPEN FIELD				OPEN FIELD	OPEN FIELD				OPEN FIELD		
No.	of People	1	-		_				_							-				-	_				1		
	Date	05/06/2004	05/06/2004		05/06/2004				05/06/2004			05/07/2004				05/07/2004				05/07/2004	05/07/2004				05/07/2004		

	nditions	HOT	HOT	НОТ	HOT	НОТ	HOT	НОТ	HOT	HOT	WARM
	Field Conditions	SUNNA	SUNINY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
	Pattern	NA	LINEAR	NA	ΥN	LINEAR	NA	LINEAR	NA	NA	NA
Track Method =Other	Explain	NA	CHIP	NA	ΑN	CHIP	ΥN	CHIP	NA	NA	NA
Track	Method	NA	NA	A N	NA	NA	NA	NA	NA	NA	NA
Onerational Status	Comments	BREAK	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID BH5 TOTAL 151 HITS	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID A5	LUNCH	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID AS	BREAK	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID A5 TOTAL 151 HITS	SETUP/ MOBILIZATION SETTING UP TEST AREA YUMA EXTREME	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID G7
	Operational Status	BREAK/LUNCH	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	BREAK/LUNCH	COLLECT DATA	BREAK/LUNCH	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION
Duration.	min	15	35	35	05	55	15	77	18	10	82
Status	Time	1000	1035	1110	1200	1255	1310	1332	1350	1400	0735
Status	Time	0945	1000	1035	1110	1200	1255	1310	1332	1350	0610
	Area Tested	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	OPEN FIELD	ОРЕМ РІЕГД	YUMA EXTREME	YUMA EXTREME	YUMA EXTREME
No. of	People	-		1	1		1	1	-	1	-
	Date	05/07/2004	05/07/2004	05/07/2004	05/07/2004	05/07/2004	05/07/2004	05/07/2004	05/07/2004	05/07/2004	05/10/2004

		T	Τ.	Т.	Т.	T ,		T	T	T
	Field Conditions	WINDY	HOT	HOT	HOT	HOT	HOT	WARM	WARM	WARM
	Eield Co	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
	Paffern	LINEAR	AN	AM	NA	LINEAR	Y V	NA	LINEAR	NA
Track Method	=Other Explain	CHIP	NA	NA	NA	CHIP	Y Y	NA	CHP	NA
	Track Method	NA	NA	NA	NA	NA	NA	NA	ΑΝ	NA
	Operational Status Comments	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID G7	BREAK	SETUP/MOBILIZAT ION SETTING UP TEST AREA ROPH GRID G8	LUNCH	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID G8 TOTAL 174 HITS	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID H8	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID H8 TOTAL 32 HITS	BREAK
	Operational Status	COLLECT DATA	BREAK/LUNCH	STOP/CALIBRATION	BREAK/LUNCH	COLLECT DATA	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH
:	Duration, min	150	15	70	45	120	15	65	08	17
Status	Stop Time	1005	1020	1130	1215	1415	1430	0650	0810	0827
Status	Start Time	0735	1005	1020	1130	1215	1415	0545	0650	0810
	Area Tested	YUMA EXTREME	YUMA EXTREME	YUMA EXTREME	YUMA EXTREME	YUMA EXTREME	YUMA EXTREME	YUMA EXTREME	YUMA EXTREME	YUMA EXTREME
No.	OI People	-	1	1	-	-	-	_		-1
	Date	5/10/2004	05/10/2004	05/10/2004	05/10/2004	05/10/2004	05/10/2004	5/11/2004	05/11/2004	05/11/2004

	iditions	WARM	WARM	WARM	WARM	WARM		WARM	WARM	WARM
	Field Conditions	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY	SUNNY
	Pattern	NA	LINEAR	NA	NA	NA	ΝΑ	NA	NA	LINEAR
Track Method	=Other Explain	NA	CHIP	NA	NA A	NA	A A	NA	AN	CHIP
1	Irack	N A	A N	ΝΑ	NA A	NA	N	N A	AN A	NA
Charles Charles	Operational Status Comments	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID H7	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID H7 TOTAL 17 HITS	BREAK	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRID J1 AND J2	LUNCH	SETUP/ MOBILIZATION SETTING UP TEST AREA MOGUL	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	SETUP/ MOBILIZATION SETTING UP TEST AREA ROPE GRIDS 11/12, AND 13	COLLECT DATA BI-DIRECTIONAL SOUTH TO NORTH GRID JI AND J2
	Operational Status	SETUP/DAIL'Y START/ STOP/CALIBRATION	COLLECT DATA	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	BREAK/LUNCH	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/DAILY START/ STOP/CALIBRATION	COLLECT DATA
Durofice	Duration, min	23	<i>L</i> 9	33	85	50	08	ĸ.	28	84
Status	Stup	0820	0957	1030	1155	1245	1405	1410	0613	0737
Status	Time	0827	0820	0957	1030	1155	1245	1405	0545	0613
	Area Tested	YUMA EXTREME	YUMA EXTREME	YUMA EXTREME	MOGUL	MOGUL	MOGUL	MOGUL	MOGUL	MOGUL
Š.	People		•••	1	1	Ţ	1	-	₩.	.
	Date	05/11/2004	05/11/2004	05/11/2004	05/11/2004	05/11/2004		05/11/2004	05/12/2004	05/12/2004

Note: Activities pertinent to this specific demonstration are indicated in highlighted text.

					_			_				,	_	_								_				_					_
	Field Conditions	WARM	HOT				E	HOI	HOT				HOT	HOT					HOT		WARM					WAKM					בְּלָבָן
	Field Co	SUNNY	SUNNY				Or Thursty	SUNNY	SUNNY				SUNNY	SUNNY					SUNNY		SUNNY				AT IT IT IT	NNIO O					STRINGS
	Pattern	NA	LINEAR				12	NA A	NA				Ϋ́	LINEAR					NA		NA				1 10 11 11 11	LINDAR					ΔN
Track Method =Other	Explain	NA	CHIP				MA	¥N.	Y V				Ϋ́	CHIP					ΥN		NA				anio						ΨN
Track	Method	AN A	Ϋ́				NA	VAI	A A				NA	NA					ΥN	-	NA				MA	Ç					NA
Operational Status	Comments	BKEAK	COLLECT DATA	BI-DIRECTIONAL	HINON OF HISOS	GKIDS 31/32, AND 33	REFAK	אריזאומ	SETUP/ MOBILIZATION	SETTING UP TEST	AREA ROPE GRIDS	11/12, AINDIS	LUNCH	COLLECT DATA	BI-DIRECTIONAL	SOUTH TO NORTH	GRIDS 11/12 ANDI3	IOIAL 164 HIIS	END OF DAILY OPERATIONS/	EQUIPMENT BREAKDOWN	SETUP/	MOBILIZATION	SETTING UP TEST	AREA ROPE GRIDS	COI I ECT DATA	BI DIDECTIONAL	SOI ITH TO NOPTH	GPID HILLS AND	מאוט מווות אועס	TOTAL 143 HITS	END OF TEST
	Operational Status	BNEANLUINCH	COLLECT DATA				BREAKITINCH	TO LOCATION OF THE PARTY OF THE	SETUP/DAILY START/ STOP/CALIBRATION			***************************************	BREAK/LUNCH	COLLECT DATA					SETUP/DAILY START/ STOP/CALIBRATION		SETUP/DAILY START/	STOP/CALIBRATION			COLLECTIONTA						DEMOBILIZATION
Duration,	E °	0 2	60				21		20			37	62	124					91		48				112						240
Status Stop	1 me	27.00	\$				0905	000	5560			5	3	1304				300,	1320		0623				0815						1215
Status Start	11me	0745	<u>}</u>				0844	2000	C060			0065	200	1100					1304		0535				0623						0815
E e	Area rested	MOGIT	TOPOIN				MOGUL	TI COM	MOGOL			MOGIII	MOGOL	MOGUL				TIO OIL	MOGUL		MOGUL				MOGUL						MOGUL
No. of	r conic	-	4				-	-				-	-	-				-			-				1	-					
Pate	05/12/2004	05/12/2004					05/12/2004	05/12/2004	100212100			05/12/2004	000000000000000000000000000000000000000	4007/71/00				05/12/2004	-36		05/13/2004				05/13/2004						05/13/2004

Note: Activities pertinent to this specific demonstration are indicated in highlighted text.

APPENDIX E. REFERENCES

- 1. Standardized UXO Technology Demonstration Site Handbook, DTC Project No. 8-CO-160-000-473, Report No. ATC-8349, March 2002.
- 2. Aberdeen Proving Ground Soil Survey Report, October 1998.
- 3. Data Summary, UXO Standardized Test Site: APG Soils Description, May 2002.
- 4. Yuma Proving Ground Soil Survey Report, May 2003.
- 5. Practical Nonparametric Statistics, W.J. Conover, John Wiley & Sons, 1980, pages 144 through 151.

APPENDIX F. ABBREVIATIONS

AEC = U.S. Army Environmental Center

APG = Aberdeen Proving Ground

ASCII = American Standard Code for Information Interchange.

ATC = U.S. Army Aberdeen Test Center

EM = electromagnetic

EMI = electromagnetic interference

EMIS = Electromagnetic Induction Spectroscopy

ERDC = U.S. Army Corps of Engineers Engineering Research and Development Center

ESTCP = Environmental Security Technology Certification Program

EQT = Army Environmental Quality Technology Program

GPS = Global Positioning System
JPG = Jefferson Proving Ground

POC = point of contact
QA = quality assurance
QC = quality control

ROC = receiver-operating characteristic

RTK = real time kinematic RTS = Robotic Total Station

SERDP = Strategic Environmental Research and Development Program

UXO = unexploded ordnance

-{

YPG = U.S. Army Yuma Proving Ground

APPENDIX G. DISTRIBUTION LIST

DTC Project No.8-CO-160-UXO-021

Addressee	Copies
Commander U.S. Armay Environmental Conton	
U.S. Army Environmental Center ATTN: SFIM-AEC-ATT (Mr. George Robitaille) Aberdeen Proving Ground, MD 21010-5401	2
Human Factors Associates Inc. ATTN: (Mr. Scott Hemstreet) 8 Jay Gould Ct. Unit D Waldorf, MD 20602	1
SERDP/ESTCP ATTN: (Ms. Anne Andrews) 901 North Stuart Street, Suite 303 Arlington, VA 22203	1
Commander	
U.S. Army Aberdeen Test Center ATTN: CSTE-DTC-SL-E (Mr. Larry Overbay) (Library) CSTE-DTC-AT-CS-R Aberdeen Proving Ground, MD 21005-5059	1 1 1
Defense Technical Information Center 8725 John J. Kingman Road, STE 0944 Fort Belvoir, VA 22060-6218	2

Secondary distribution is controlled by Commander, U.S. Army Environmental Center, ATTN: SFIM-AEC-ATT.